



DRC INSIGHT™
ONLINE LEARNING SYSTEM

Technology User Guide
Volume II: Testing Site
Manager (TSM)

Central Office Services (COS)

South Carolina

Data Recognition Corporation (DRC)
13490 Bass Lake Road
Maple Grove, MN 55311

Toll Free 1-800-451-7834
eDIRECT: <https://sc.drctdirect.com>
Email: SCProject@datarecognitioncorp.com
Revision Date: July 23, 2017

COPYRIGHT

Copyright © 2018 Data Recognition Corporation

The following items in DRC INSIGHT are protected by copyright law:

- The User Guide.
- All text and titles on the software's entry and display, including the look and feel of the interaction of the windows, supporting menus, pop-up windows, and layout.

DRC INSIGHT Online Learning System and DRC eDIRECT are trademarked by Data Recognition Corporation.

Any individuals or corporations who violate these copyrights and trademarks will be prosecuted under both criminal and civil laws, and any resulting products will be required to be withdrawn from the marketplace.

The following are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries:

Internet Explorer
Microsoft
Windows
Windows Vista
Windows XP
Windows 7
Windows 8
Windows 10

The following are trademarks or registered trademarks of Apple Corporation in the United States and/or other countries:

Apple
Macintosh
Mac
OS X and macOS
iPad
iOS*
*iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.
Safari

The following are trademarks or registered trademarks of Google Corporation in the United States and/or other countries.

Android
Chrome
Chromebook
Google Play

The following is a trademark or registered trademark of Mozilla Corporation in the United States and/or other countries.

Firefox

<p>■ Introduction</p>	<p>About This Guide.....6</p> <p>TSM Overview.....7</p> <p style="padding-left: 20px;">Content and Response Caching7</p> <p style="padding-left: 20px;">TSM Diagnostic Tools7</p>
<p>■ TSM System Requirements and Testing Information</p>	<p>What’s Covered in This Section.....9</p> <p>TSM Installation and the Number of Students Testing.....9</p> <p>TSM System Requirements Information9</p> <p>Tablet Devices and the TSM.....9</p> <p>Software Installation and Update Rights9</p>
<p>■ TSM Windows Installation</p>	<p>What’s Covered in This Section.....11</p> <p>Installing a TSM11</p> <p>Installing Multiple TSMs and INSIGHT11</p> <p>Quick Tour: Installing a TSM for Windows OS12</p> <p>Managing the TSM16</p> <p style="padding-left: 20px;">Installing a TSM from the Command Line.....16</p> <p style="padding-left: 20px;">Starting and Stopping the TSM.....17</p> <p style="padding-left: 20px;">Uninstalling the TSM.....18</p>
<p>■ TSM Mac (OS X and macOS) Installation</p>	<p>What’s Covered in This Section.....20</p> <p>Installing a TSM20</p> <p>Installing Multiple TSMs and INSIGHT20</p> <p>TSM for Mac Installation Prerequisite: Java 1.721</p> <p>Quick Tour: Installing a TSM for Mac OS X and macOS.....22</p> <p>Managing the TSM26</p> <p style="padding-left: 20px;">Starting and Stopping the TSM.....26</p> <p style="padding-left: 20px;">Uninstalling the TSM.....26</p>

■ Working with the TSM

What's Covered in This Section.....	28
Testing Site Manager Tools.....	28
Using the TSM.....	29
Using Content Caching.....	32
Testing with Content Caching.....	32
Content Caching.....	33
Response Caching—Viewing Unsent Student Test Responses	37
Response Caching—Viewing Historical Test Responses	40
Ping Activity	42
Graphing Ping Activity	43
Load Simulation Testing	47
Performing a Load Simulation.....	48
Analyzing Load Simulation Results	52
Viewing Historical Simulation Data	54
Load Balancing the TSM	57
Prerequisites.....	57
Registering a TSM for Load Balancing	58
Updating the TSM Clock Time.....	62
Resetting the Time on a Windows 7 TSM Computer	63
Resetting the Time on a Mac (OS X and macOS) TSM Computer ..	64

■ Appendix

Using a TSM with COS	66
Quick Tour: Specifying a TSM in COS for Response Caching.....	67

Introduction



■ About This Guide

This volume, *Volume II: Testing Site Manager (TSM)*, is part of a multi-volume set of user guides that describe how to configure, install, manage, and troubleshoot DRC INSIGHT (or INSIGHT). INSIGHT provides a number of tools and testing information to help you troubleshoot your testing environment and verify that it is ready for testing.

This user guide describes how to configure, install, manage, and troubleshoot the Testing site Manager (TSM) software. It contains configuration and installation information for the various TSM environments and describes how to use the TSM and its components.

Important Information

.....
 **Important:** Throughout this user guide, the Information icon () indicates important information or crucial tips.
.....

■ TSM Overview

Content and Response Caching

The TSM is a web-based application that provides caching and software tools. Usually, you install the TSM caching software on one or more strategic computers with sufficient bandwidth to help manage communication between test devices and the DRC INSIGHT server.

The TSM offers two types of caching—content caching for test content and response caching for student test responses. At test time, the TSM content caching software sends its cached test items to the testing devices. This content must be current in order for students to test.

! Important: You cannot use a TSM for content caching if you are using COS service devices and Content Management in the same COS location. When you specify a COS service device to perform Content Management within a location, all content caching (Content Management) service is performed by this device.

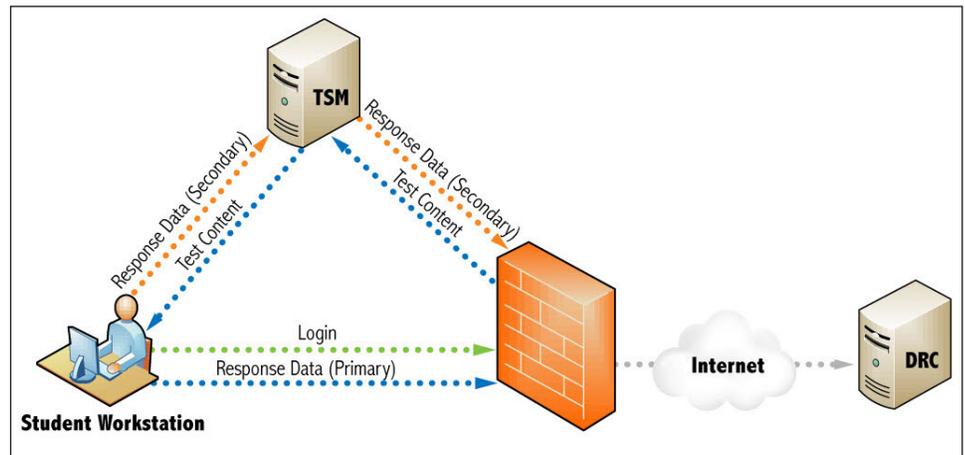


Figure: TSM Content and Response Caching

During testing, if the test computers can communicate with the DRC INSIGHT server, responses go directly to the server. If test computers cannot communicate with the server, the response caching software buffers and stores their test responses. When the response caching software is communicating with DRC, it sends test responses to the DRC INSIGHT server every fifteen minutes. Even if DRC is not currently communicating with the testing computers, the test responses are still being stored on the TSM for transmission to DRC, so no responses are lost.

! Important: TSM response caching is used *during* a test session—students cannot start a test session if there is no communication between the INSIGHT server and the testing device, or if there are unsent responses on the TSM.

TSM Diagnostic Tools

The TSM also offers diagnostic software tools, including Load Simulation Tests and Ping Trend Graphs.

TSM System Requirements and Testing Information



■ What's Covered in This Section

■ TSM Installation and the Number of Students Testing

■ TSM System Requirements Information

■ Tablet Devices and the TSM

■ Software Installation and Update Rights

This section contains a link to the specific hardware, software, network, and desktop requirements to configure the Testing Site Manager (TSM) and automatic software updates.

As a general guideline, you can install the TSM software for a large number of students that are testing at the same time (concurrently). This guideline is based on the following assumptions:

- The TSM software is configured for content caching.
- The TSM software is installed on a dedicated device.
- The TSM device and network meet the necessary system requirements.

The number of TSMs required may differ based on the actual hardware and software specifications of the TSM device, the network speed, and the TSM caching options selected.

For details regarding TSM system requirements and the number of concurrent testers, refer to the latest version of the *DRC INSIGHT Online Learning System Supported System Requirements* available at your state's eDIRECT site by navigating to **All Applications—General Information—Downloads** and clicking **View System Requirements** at the bottom of the Test Setup General Information page.

[View System Requirements](#)

[Monitor Setting Verification](#)



[Supported System Requirements](#)

A TSM is used primarily to cache and manage test content and responses. iPad, Chromebook, and other tablet devices do not provide a suitable environment for a TSM. As a result, you should install the TSM software on a Windows PC, Mac (OS X or macOS) computer, and connect to the TSM when you install INSIGHT on the tablet device.

ⓘ Important: Certain software rights are required to install and/or automatically update INSIGHT and the TSM software. INSIGHT requires Administrator rights to install it and Write access to perform the software Automatic Update function. The TSM software requires Administrator rights to install it and to perform the software Automatic Update function.

TSM Windows Installation



■ What's Covered in This Section

This section describes the Testing Site Manager (TSM) installation process in a Windows environment.

.....
⚠ Important: To make the installation process easier, DRC recommends that you install the TSM before you use the Central Office Services - Device Toolkit to create configurations and before you install INSIGHT.
.....

The first part of this section provides basic information about installing and uninstalling a TSM. Then, the section provides more advanced technical information about the following topics:

- Managing a TSM—starting, stopping, and uninstalling
- Working with the TSM in a non-graphical (terminal) mode using Windows operating system commands

■ Installing a TSM

Because of the role that the TSM plays in testing, there are some special considerations regarding TSM software installation.

- It is best if the computer on which you install the TSM software has a static IP address. If the IP address of the TSM machine changes, the TSM Server Domain address will update to the current IP address the next time the TSM communicates with DRC. But, during the time the IP address is out of date, any testing computers that attempt to use the TSM will not point to the correct TSM machine.
- If you need to change the configuration of a TSM after it is installed, you must uninstall the TSM and install a new version. If you reinstall a TSM, you may need to reconfigure the testing devices that connect to it.
- There are now two versions of the TSM for Windows: 32-bit and 64 bit. If you are installing the TSM on a 64-bit Windows machine that has a TSM, you must uninstall the old TSM and install the new 64-bit version.

■ Installing Multiple TSMs and INSIGHT

If you plan to perform multiple types of assessments using the same testing computers, you may need to install more than one TSM and use INSIGHT to access more than one testing program.


- You cannot install more than one TSM on the same computer.
- You can install a TSM and INSIGHT on the same computer.
- You can use INSIGHT to access multiple testing programs from the same device. You access these testing programs using the same DRC INSIGHT desktop shortcut. When you start INSIGHT, a page displays listing the different testing programs from which you can select.

Quick Tour: Installing a TSM for Windows OS

This Quick Tour describes how to install a TSM for Windows. DRC provides an easy-to-use wizard to install the TSM software.

1. To launch the wizard and start the installation, sign on to eDIRECT, open the **All Applications** menu bar, select **General Information–Downloads** and click the **Testing Site Manager (TSM) installer icon** (📄) for Windows. Use the correct version for the TSM computer: 32-bit or 64-bit.


At this time, you also may want to download the INSIGHT Secure Browser Installer for Windows.

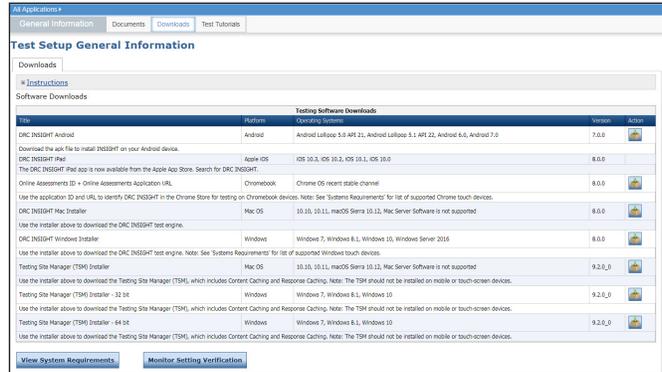

2. After you download the installation program, click **TESTING_SITE_MANAGER_Setup.exe** to launch the wizard and start the installation.


The Welcome screen displays the Testing Site Manager (TSM) Setup Wizard. Click **Next** to continue.

Note: On most installation windows, you have the option of clicking **Back** to return to the previous window or **Next** to proceed to the next window. Some windows display other options.

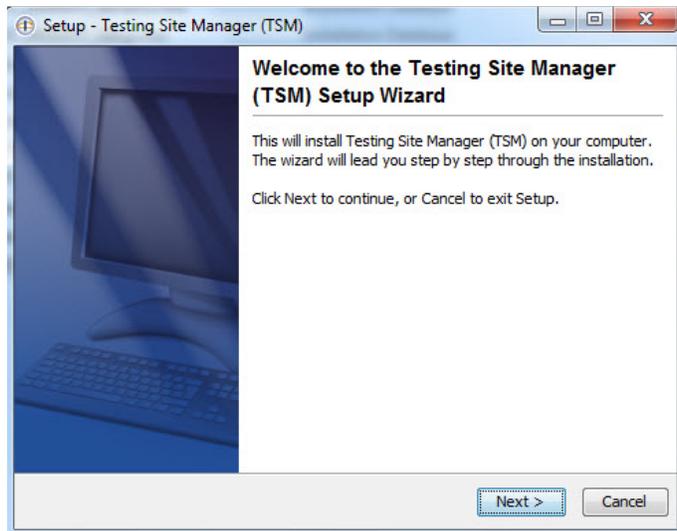

3. The DRC INSIGHT License Agreement window displays. To continue the installation, read the agreement and select the option **I accept the agreement**. (If you do not accept the agreement, the installation ends.)

When the Next button becomes active, click **Next** to continue.

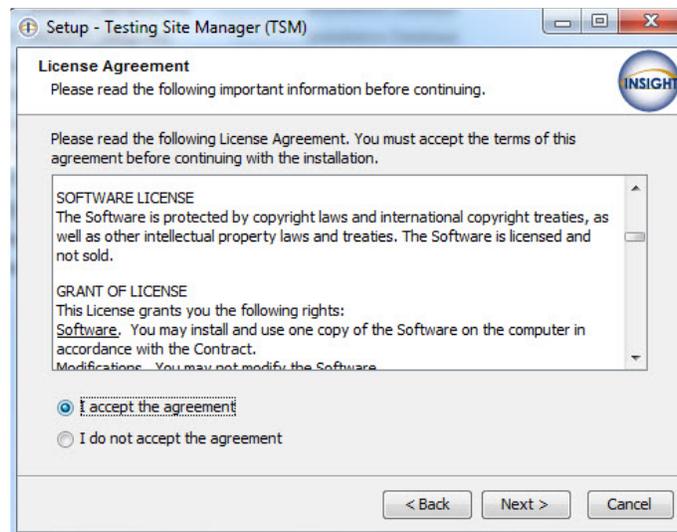

Quick Tour: Installing a TSM for Windows OS (cont.)

- The Select Configuration Options window displays. On this window you specify whether to enable content caching and response caching. The default values are to enable both types of caching. After you make your selections, click **Next** to continue.




! Important: Install the TSM software on a computer that will be powered on when test content is automatically updated. If the computer is not on or is unavailable, it will not be updated. Whenever you restart a computer that has the TSM software installed, or anytime you plan to use the TSM for testing, verify that the TSM software and test content are up to date before you attempt to test (see “Content Caching” on page 33).

- The Automatic Update window displays. On this window, specify whether to enable automatic TSM software updates.
 - If you select **Enable Automatic Update** (the default value), DRC updates the TSM software automatically. DRC recommends enabling automatic updates.
 - If you select **Disable Automatic Update**, DRC notifies you whenever an update to the TSM software is available and you must update the software manually.

! Important: You use the Central Office Services - Device Toolkit to change the TSM configuration of a testing device. If you update a device’s TSM configuration, the next time you start INSIGHT it automatically updates the configuration of the testing device to reflect the changes.

Click **Next** to continue.

- During the installation, a window displays to indicate the progress of the installation. If necessary, click **Cancel** to end the process.

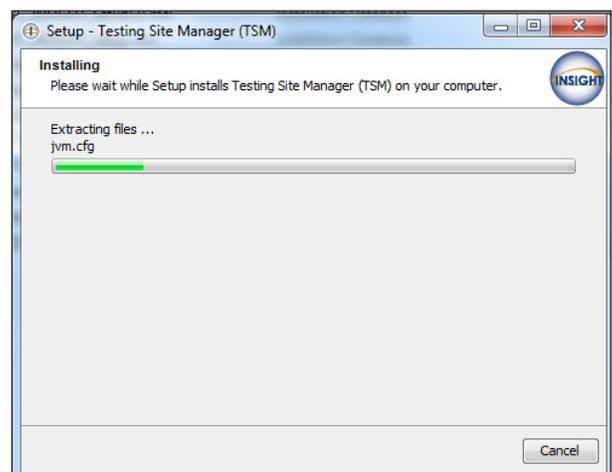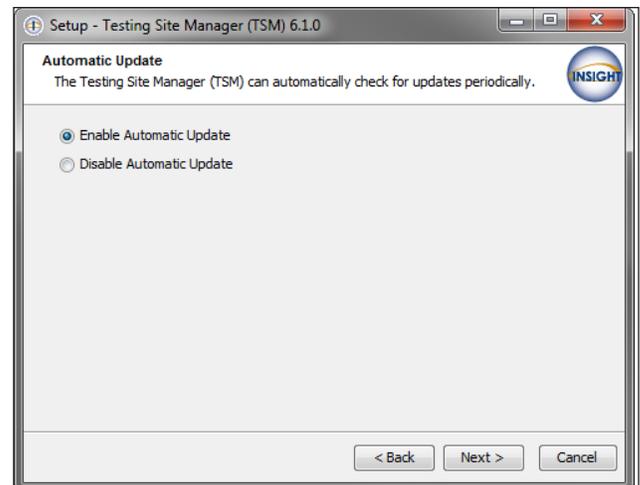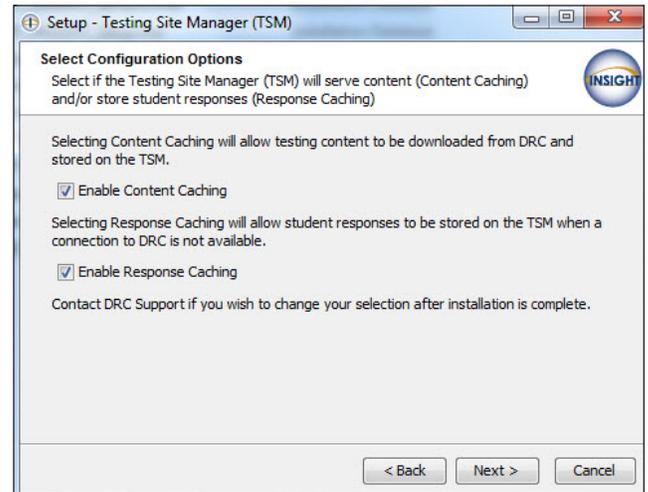


Quick Tour: Installing a TSM for Windows OS (cont.)

7. The Setup Complete window displays.

! Important: Record the port numbers, you need this information when you install INSIGHT. You can change the port numbers from this window. Click **Finish** when you are ready.

- The TSM HTTP Port Number is the port number for regular communication.
- **The TSM HTTPS Port Number is the port number for encrypted communication that the INSIGHT secure web browser uses.**


! Important: To avoid conflicts, verify that no other device is using either port. For Windows, you can enter the command **netstat -a** from a command prompt to display the list of ports currently being used.

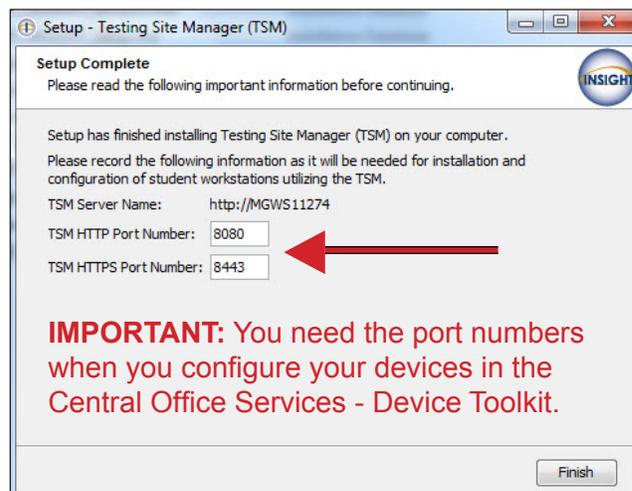

8. After the installation is complete, start the TSM from the Start menu by selecting **All Programs–TestingSiteManager–TestingSiteManager**.

Note: If you specified Content Caching (step 4), your standard test forms and items are downloaded automatically with the TSM installation (see “Content Caching” on page 33).

9. When the **Enter Testing Site Manager Name** window displays, enter a name (up to 40 characters) to help you remember the location of the TSM machine in the TSM Name field. DRC recommends that you include some combination of the district, school, and location (building and/or room number) of the TSM. Click **Save**.

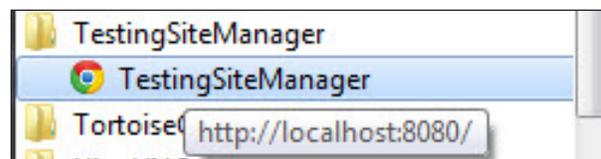


Quick Tour: Installing a TSM for Windows OS (cont.)

10. The TSM displays.

.....
! **Important:** Record or copy the **TSM Server Domain** address—you need this information to configure your devices in the Central Office Services - Device Toolkit.
.....

IMPORTANT: Record or copy the **TSM Server Domain** address—you need this information to configure your devices in the Central Office Services - Device Toolkit.

If you are using an accommodation, check the checkbox to select the media content you need (for example, Download HVA) and click **Update Content** to load the latest test versions.

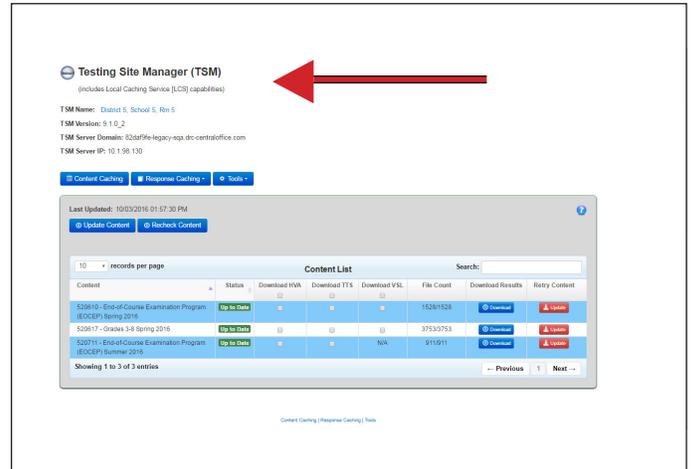

Managing the TSM

This section describes how to install a TSM from the command line, how to start and stop a TSM from a command line, and how to uninstall a TSM.

Installing a TSM from the Command Line

You can install a TSM in the Windows environment using the command line interface instead of the graphical interface. This type of installation is useful to install the software in unattended mode or to install it quickly on a number of computers. To run the TSM installation in unattended mode, do the following:

1. Log in to eDIRECT, open the **All Applications** menu bar, select **General Information–Downloads**, and download the TSM setup command file, TESTING_SITE_MANAGER_Setup.exe, to a directory or location that you specify.
2. Start a command prompt (**Start–Run–Cmd**) and navigate to the directory or location where the file was downloaded.
3. Execute the TESTING_SITE_MANAGER_Setup command (with appropriate options) for 32-bit machines.

TESTING_SITE_MANAGER_Setup -q

Execute the TESTING_SITE_MANAGER_Setup_64 command (with appropriate options) for 64-bit machines.

TESTING_SITE_MANAGER_Setup_64 -q

! Important: Use the correct command for the type of machine you have, 32-bit or 64-bit. The command and machine type must match.

The following figure shows the list of setup options.


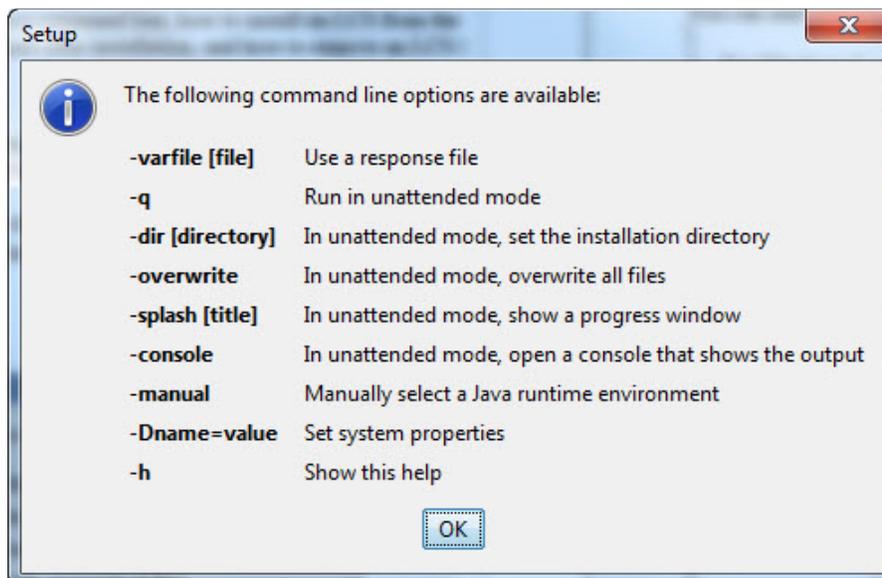


Figure: TSM Setup Command Options

Starting and Stopping the TSM

You can start and stop the TSM using the Control Panel.

1. For Windows 7, select **Control Panel–System and Security–Administrative Tools–Services**.

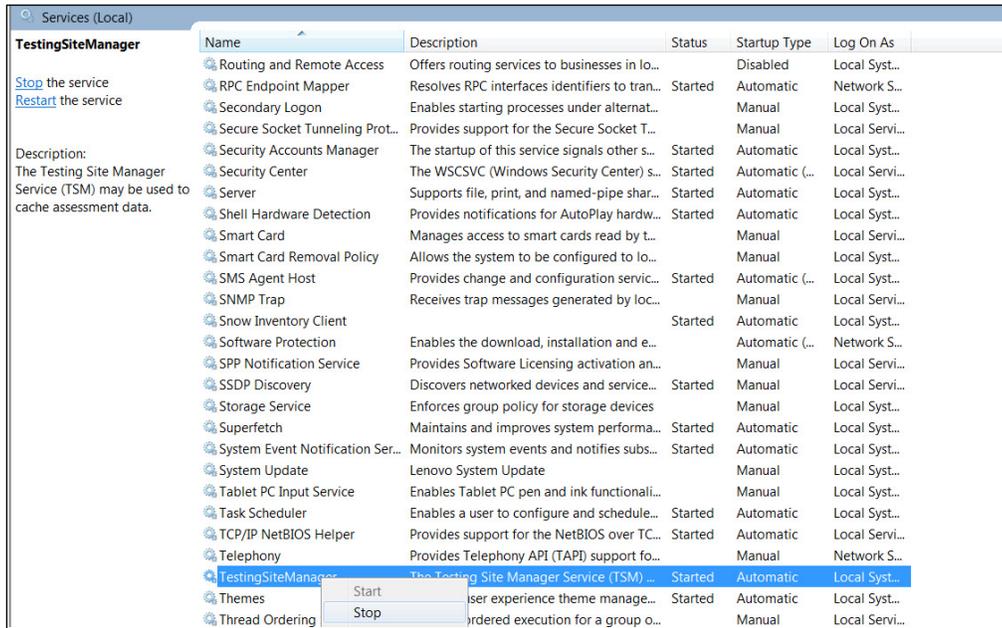

2. The Services window displays. Select **TestingSiteManager**.
3. To stop the TSM, right-click and select **Stop**. To restart the TSM, right-click and select **Start**.

Uninstalling the TSM

You can uninstall (remove) the TSM using the Control Panel. If you want to uninstall the TSM, verify that there are no unsent responses. If there are, transmit them manually first. If the TSM has unsent stored responses, the uninstall won't finish (see "Response Caching-Viewing Unsent Student Test Responses" on page 37).

Note: If you are unable to remove a TSM, please contact Customer Service.


Using the Control Panel

To uninstall the TSM using the Control Panel, do the following:

1. Select **Uninstall a Program** and select **Testing Site Manager (TSM) – SC**.
2. Right-click and select **Uninstall/Change**.



3. Click **Next** when the Testing Site Manager (TSM) Uninstall wizard displays. The wizard walks you through the process.

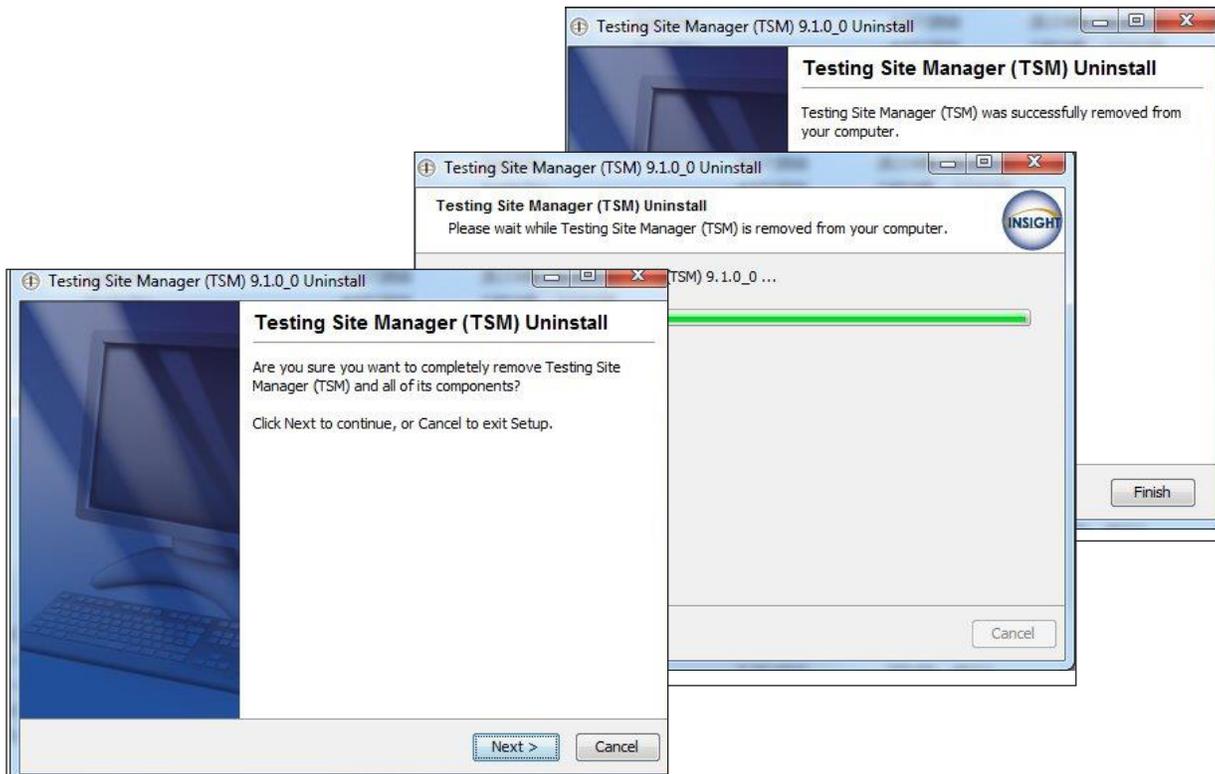

4. Navigate to the location where the TSM was installed and verify that is uninstalled. If you plan on installing a new TSM, please reboot the TSM machine before you install a new TSM.

TSM Mac (OS X and macOS) Installation



■ What's Covered in This Section

This section describes the Testing Site Manager (TSM) installation process in a Mac (OS X) environment.

.....
! **Important:** To make the installation process easier, DRC recommends that you install the TSM before you use the Central Office Services - Device Toolkit to create configurations and before you install INSIGHT.
.....

First, this section provides basic information about installing and uninstalling a Testing Site Manager (TSM) using the standard Mac graphical interface. Then, the section provides more advanced technical information about the following topics:

- Managing a TSM: starting, stopping, and uninstalling
- Working with a TSM in a non-graphical (terminal) mode using Mac (OS X) operating system commands

■ Installing a TSM

Because of the role that the TSM plays in testing, there are some special considerations regarding TSM software installation.

- It is best if the computer on which you install the TSM software has a static IP address. If the IP address of the TSM machine changes, the TSM Server Domain address will update to the current IP address the next time the TSM communicates with DRC. But, during the time the IP address is out of date, any testing computers that attempt to use the TSM will not point to the correct TSM machine.
- If you need to change the configuration of a TSM after it is installed, you must uninstall the TSM and install a new version. If you reinstall a TSM, you may need to reconfigure the testing devices that connect to it.
- A TSM cannot be installed on a Mac (OS X and macOS) device that is running mac OS server software.

■ Installing Multiple TSMs and INSIGHT

If you plan to perform multiple types of assessments using the same testing computers, you may need to install more than one TSM and use INSIGHT to access more than one testing program.

- You cannot install more than one TSM on the same computer.
- You can install a TSM and INSIGHT on the same computer.
- You can use INSIGHT to access multiple testing programs from the same device. You access these testing programs using the same DRC INSIGHT desktop shortcut. When you start INSIGHT, a page displays listing the different testing programs from which you can select.


TSM for Mac Installation Prerequisite: Java 1.7

Before installing the TSM, verify that the TSM computer has Java 1.7 (versions 7u79) installed. The TSM will not work with any other version of Java. Use the following procedure to check the version of Java on the TSM computer. To update Java, see <http://www.oracle.com/technetwork/java/javase/downloads/jre7-downloads-1880261.html>.

Note: You do not need to perform this process if you are using TSM level 9.1.0_2 or higher.

1. Go to System Preferences and locate the Java icon. Double-click **Java** to display the Java Control Panel.

Note: If you do not see a Java icon, the Java version is below 1.7. You need to update the Java level before installing the TSM.

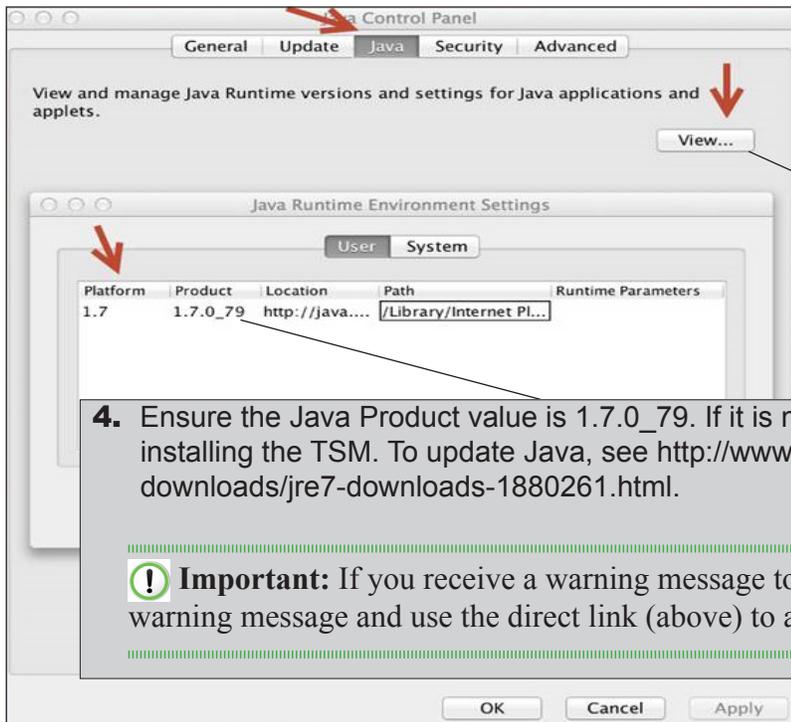

2. Select the **Java** tab at the top of the window.
3. Click the **View** button to display Java details.

4. Ensure the Java Product value is 1.7.0_79. If it is not, you must update Java before installing the TSM. To update Java, see <http://www.oracle.com/technetwork/java/javase/downloads/jre7-downloads-1880261.html>.

! Important: If you receive a warning message to update to Java 1.8, cancel out of the warning message and use the direct link (above) to access the Java 1.7 installation.

TSM Mac (OS X and macOS) Installation

Quick Tour: Installing a TSM for Mac OS X and macOS

This Quick Tour describes how to install a TSM in the Mac (OS X) environment. DRC provides an easy-to-use wizard to install the TSM software.




1. To launch the wizard and start the installation, sign on to eDIRECT, open the **All Applications** menu bar, select **General Information–Downloads** and click the **Testing Site Manager (TSM) installer icon** (📦) for Mac OS. At this time, you also may want to download the Macintosh Installer for INSIGHT.
2. After you have downloaded the installation program, double-click the **TESTING_SITE_MANAGER_Setup.dmg** file and double-click the **Testing Site Manager (TSM) Installer** to start the installation.

Note: You must be a Mac System Administrator to install the TSM from this file.

3. The Welcome screen displays for the Testing Site Manager (TSM) Setup Wizard.

Note: On most of the installation windows, you can click **Back** to return to the previous window, **Next** to proceed to the next window, and **Cancel** to cancel the installation. Click **Next** to continue.

4. The DRC INSIGHT License Agreement windows displays. Read the agreement and select the option **I accept the agreement**. When the Next button becomes active, click **Next** to continue.

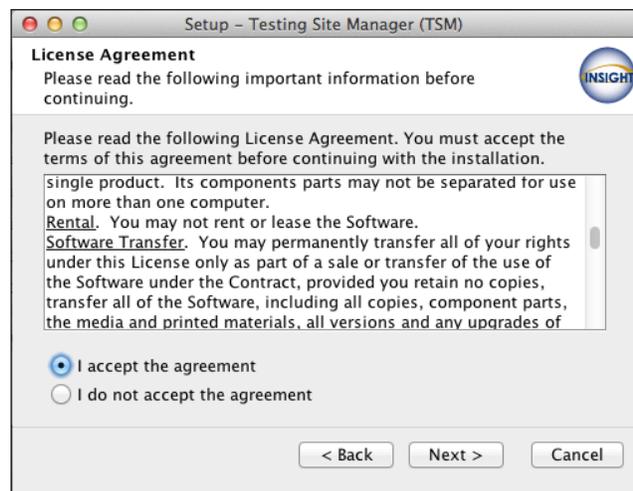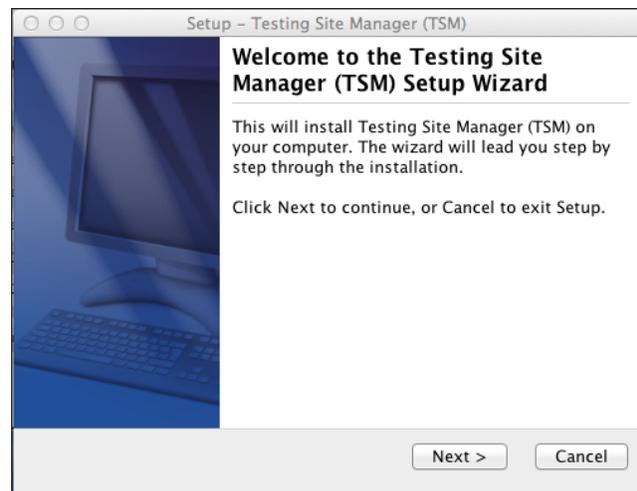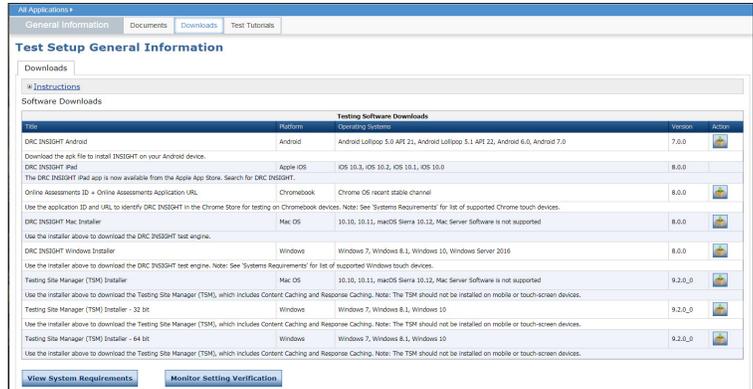

Quick Tour: Installing a TSM for Mac OS X and macOS (cont.)

5. The Select Configuration Options window displays. On this window you specify whether to enable content caching and/or response caching. The default values are to enable both types of caching. After you make your selections, click **Next** to continue.




.....
! **Important:** Install the TSM software on a computer that will be powered on when the TSM software or test content is automatically updated. If the computer is not on or is unavailable, it will not be updated. Whenever you restart a computer that has the TSM software installed, or anytime you plan to use the TSM for testing, verify that the TSM software and test content are up to date before you attempt to test (see “Content Caching” on page 33).

6. The Automatic Update window displays. On this window, specify whether to enable automatic TSM software updates.

- If you select **Enable Automatic Update** (the default value), DRC updates the TSM software automatically.
- If you select **Disable Automatic Update**, DRC notifies you whenever an update to the TSM software is available and you must update the software manually.

.....
! **Important:** You use the Central Office Services - Device Toolkit to change the TSM configuration of a testing device. If you update a device’s TSM configuration, the next time you start INSIGHT, it automatically updates the configuration of the testing device to reflect the changes.

After you have made your selection, click **Next** to start the installation. During the installation, a window displays to indicate the progress of the installation. If necessary, you can click **Cancel** to end the installation process.

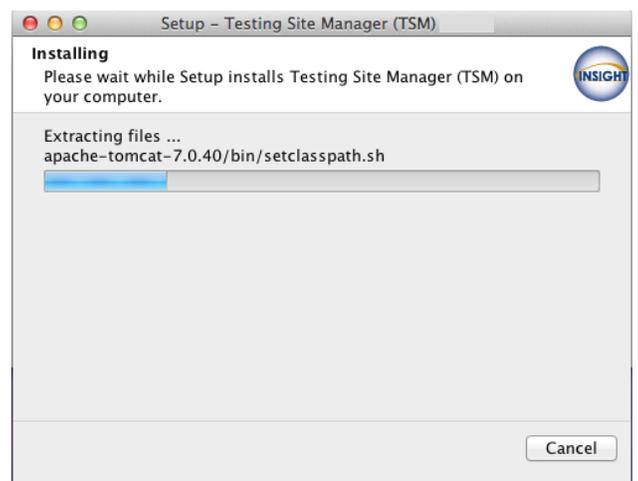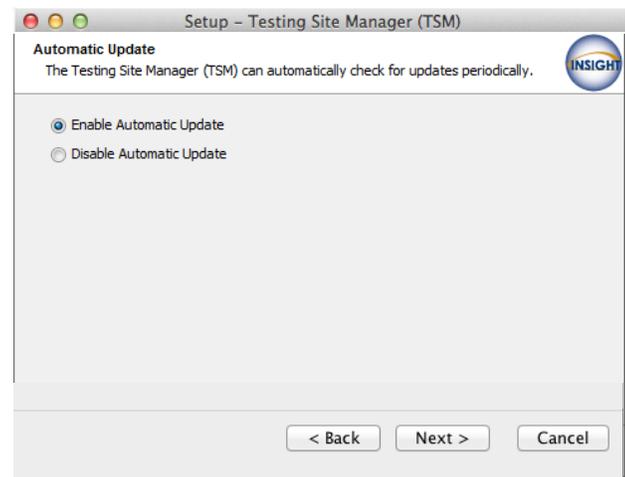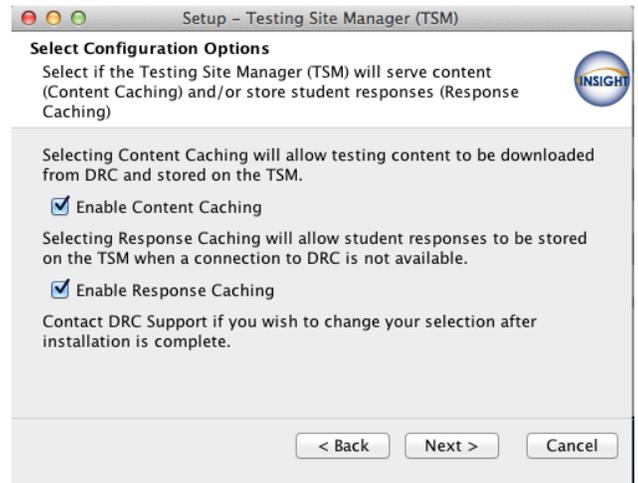


Quick Tour: Installing a TSM for Mac OS X and macOS (cont.)

7. When the installation completes, the Setup Complete window displays. **Record the port numbers—you need this information to configure the device in the Central Office Services - Device Toolkit.** You can change the port numbers from this window. Click **Finish** when you are ready.

- The TSM HTTP Port Number is the port number for regular communication.
- **The TSM HTTPS Port Number is the port number for encrypted communication that the INSIGHT secure web browser uses.**

! Important: To avoid conflicts, verify that no other device is using either port. For Mac OS X, use the Network Utility located at Applications/Utilities/Network.

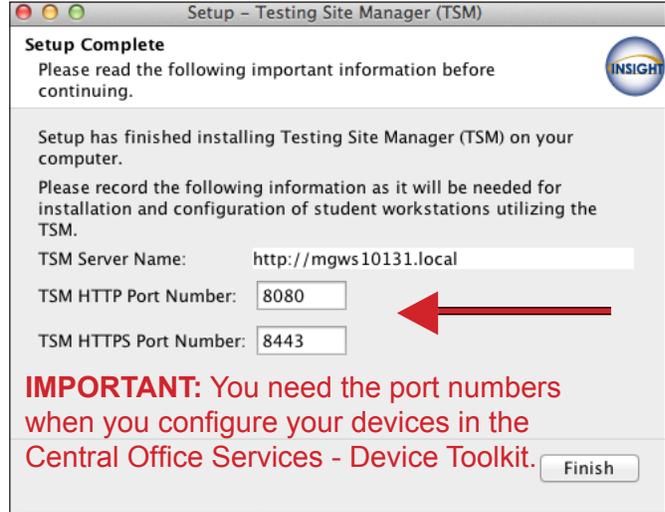


8. Start the TSM by selecting **Applications—TestingSiteManager—TestingSiteManager.url**.

Note: Because you specified Content Caching (step 5), when the TSM is first installed, your standard test forms and items are downloaded automatically (see “Content Caching” on page 33).

9. When the **Enter Testing Site Manager Name** window displays, enter a name to help you remember the location of the TSM machine in the TSM Name field. DRC recommends that you include some combination of the district, school, and location (building and/or room number) of the TSM. Click **Save**.

Note: The name is limited to 40 characters with no special formatting requirements.

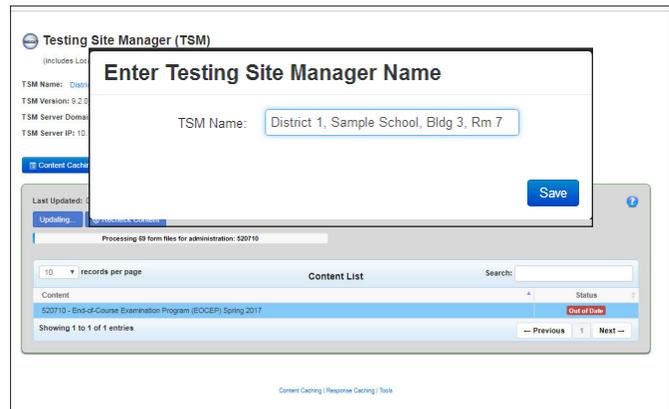


Quick Tour: Installing a TSM for Mac OS X and macOS (cont.)

10. The TSM displays.


! **Important:** Record or copy the **TSM Server Domain** address—you need this information to configure your devices in the Central Office Services - Device Toolkit.

IMPORTANT: Record or copy the **TSM Server Domain** address—you need this information to configure your devices in the Central Office Services - Device Toolkit.

If you are using an accommodation, check the checkbox to select the media content you need (for example, Download HVA) and click **Update Content** to load the latest test versions.

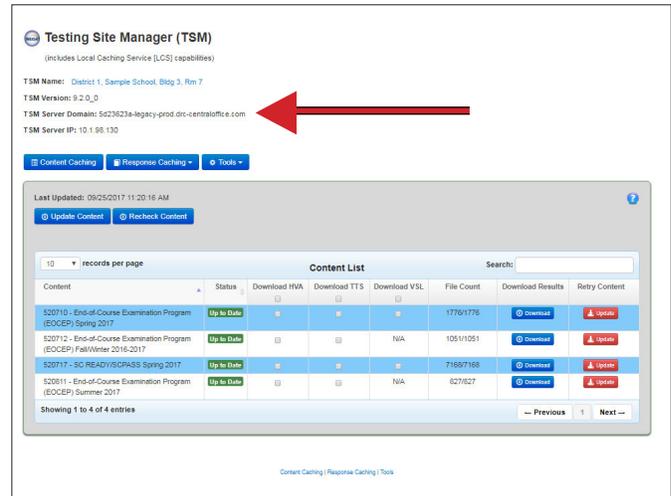

11. After installation is complete, select the **TESTING_SITE_MAN** volume from the desktop, **Ctrl-click**, and select **Eject "TESTING_SITE_MAN"** to unmount the volume and avoid potential conflicts with automatic updates.

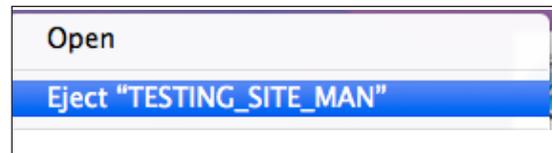

Managing the TSM

This section describes how to start and stop a TSM from a command line and how to uninstall a TSM.

Starting and Stopping the TSM


The TSM is a service that executes in the background without a standard graphical window. Technology Coordinators (TCs) should be familiar with starting and stopping the TSM with the TESTING_SITE_MANAGER script. You can use the **launchd** and **launchctl** commands to manage services. By default, the TSM is started after installation and launches anytime the computer is booted.

Uninstalling the TSM

Before you attempt to uninstall the TSM, verify that there are no unsent responses in the TSM. If there are, transmit them manually first. If there are any unsent responses, you cannot uninstall the TSM.

Note: If you are unable to remove a TSM, please contact Customer Service.

1. To uninstall (remove) the TSM, select **Applications–TestingSiteManager–Testing Site Manager (TSM) Uninstaller**.
2. Enter your Mac Administrator log-in information.
3. When the Testing Site Manager (TSM) Uninstall wizard displays, click **Next**.
4. The wizard walks you through the process.

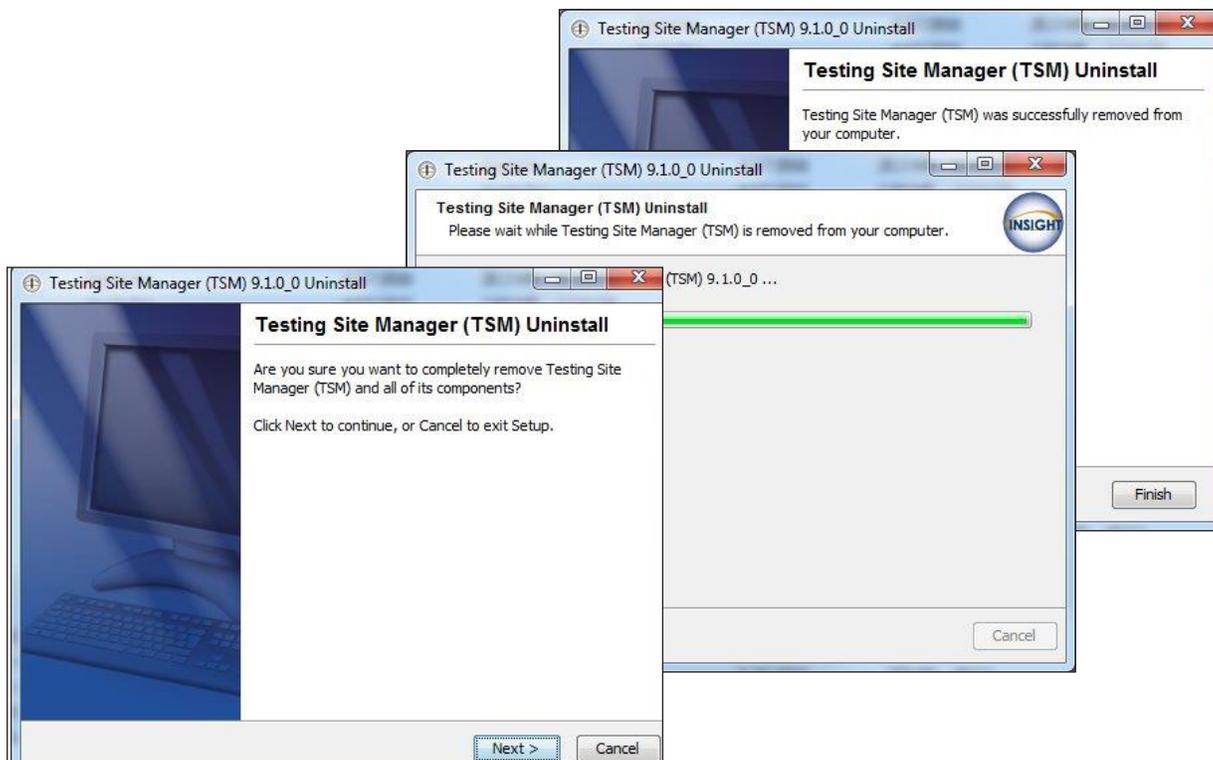

5. Verify that the **Testing Site Manager** folder has been removed from the Applications folder. If you plan to reinstall a TSM, reboot the machine before you reinstall.

Working with the TSM



■ What's Covered in This Section

■ Testing Site Manager Tools

The Testing Site Manager (TSM) contains a number of software tools to help you plan, configure, manage, and troubleshoot your online testing environment, including caching software to store tests and/or student test responses. This section describes how to use the TSM (see “Using the TSM” on page 29), as well as caching and the various TSM software tools that are available.

The following list overviews TSM caching and the TSM software tools.

Content Caching

The TSM stores tests and lets you update them to the most current versions for testing (see “Content Caching” on page 33).

Response Caching

In the event the Internet connection to DRC is lost, the TSM stores test responses and attempts to transmit them at fifteen-minute intervals to DRC.

Response caching also lets you review details about responses currently stored in the TSM (see “Response Caching-Viewing Unsent Student Test Responses” on page 37) and responses the TSM transmitted to DRC (see “Response Caching-Viewing Historical Test Responses” on page 40).

Ping Trend Graphs

Ping Trend Graphs help you determine the best time of day to test based on the variances in speed, connectivity, and responsiveness of your network communication (see “Graphing Ping Activity” on page 43).

Load Simulation Test

The Load Simulation Test helps you estimate variations in network responsiveness based on the number of students testing at the same time, the current network traffic, the amount of available bandwidth, and other site-specific factors (see “Load Simulation Testing” on page 47).

Load Balancing

The TSM offers a Load Balancing Registration feature. If your site has configured and uses load balancing hardware and software, you can use this feature to register a load balancer IP address for your pool of TSM servers to help manage your workload more efficiently.

The TSM load balancing feature is supported for content caching only—response caching is not supported for load balancing (see “Load Balancing the TSM” on page 57).

Using the TSM

This section describes how to use the TSM and its basic functions.

To start the TSM on a Windows machine, select **Start–All Programs–TestingSiteManager–TestingSiteManager**. On a MAC, select **Applications–TestingSiteManager–TestingSiteManager.url**.

Alternatively, if you know the TSM Server IP address (see page 30), you can display the TSM from a web browser by entering the following string: **http://TSM Server IP address:8080**

Replace *TSM Server IP address* with the actual IP address of the TSM. And, if you did not use the default value of 8080 for the port number during installation, replace 8080 with the actual port number you assigned to the TSM.

The first time you start the TSM, the Enter Testing Site Manager Name dialog box displays. In the TSM Name field, enter a name that will help you remember the location of the TSM machine and click **Save**.

Note: DRC recommends that you include the district, school, and location (building and/or room number) of the TSM. The name you choose is limited to 40 characters and there are no special formatting requirements.


Enter Testing Site Manager Name

TSM Name:

Save

You can click on the name of the TSM to edit it (this is the name you entered when you started the TSM for the first time).

The **Help** icon () is displayed on every page in the TSM. Click it to display online help for the page you are currently on.

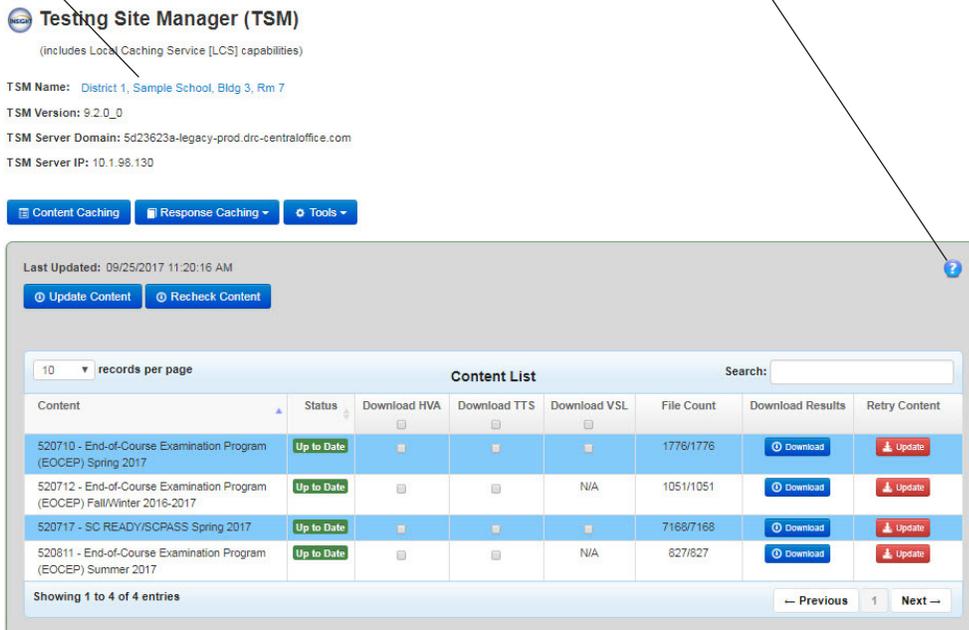

Testing Site Manager (TSM)
(includes Local Caching Service [LCS] capabilities)

TSM Name: [District 1, Sample School, Bldg 3, Rm 7](#)

TSM Version: 9.2.0_0

TSM Server Domain: Sd23623a-legacy-prod-drc-centraloffice.com

TSM Server IP: 10.1.98.130

Content Caching | Response Caching | Tools

Last Updated: 09/25/2017 11:20:16 AM

Update Content | Recheck Content

10 records per page

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
520710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1776/1776	Download	Update
520712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	1051/1051	Download	Update
520717 - SC READY/SCPASS Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7168/7168	Download	Update
520811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	827/827	Download	Update

Showing 1 to 4 of 4 entries

Content Caching | Response Caching | Tools

There are links to the functions currently configured in the TSM.

Using the TSM (cont.)

The **TSM Server Domain** indicates the domain address of the TSM server. Use this information to identify your TSM server when you configure devices in the Central Office Services - Device Toolkit.

The **TSM Version** indicates the version number of the TSM software.

The screenshot displays the Testing Site Manager (TSM) interface. At the top, it shows the TSM Name, Version, Server Domain, and Server IP. Below this are buttons for Content Caching, Response Caching, and Tools. A 'Content List' table is visible, showing details for four different examination programs. The table includes columns for Content, Status, Download HVA, Download TTS, Download VSL, File Count, Download Results, and Retry Content. The status for all listed items is 'Up to Date'.

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
520710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1776/1776	Download	Update
520712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	1051/1051	Download	Update
520717 - SC READY/SCPASS Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7168/7168	Download	Update
520811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	827/827	Download	Update

The **TSM Server IP** indicates the IP address of the TSM server. The IP address is the address the TSM Server Domain translates to and the address testing devices will use to interact with the TSM. If this is the wrong address, you must modify your network adaptor priority to point to the device that the testing devices will connect to.

Note: The IP address chosen by the TSM is determined by the priority of the network adaptor in the Network Interface Card (NIC). To change the IP address the TSM selects you must set the TSM's IP address to the have a priority of 1.

Using the TSM (cont.)

You can sort the data in a column.

- Click the up arrow icon (▲) next to the column header to sort the column data in ascending order, either alphabetically or by date, depending on the type of data.
- Click the down arrow icon (▼) next to the column header to sort the data in descending order, either alphabetically or by date, depending on the type of data.

Throughout the TSM you can use the Search field to search for specific information, such as tests, student responses, and simulation results, and filter the display.

The screenshot displays the Testing Site Manager (TSM) interface. At the top, it shows the TSM Name, Version, Server Domain, and Server IP. Below this are buttons for Content Caching, Response Caching, and Tools. The main content area features a 'Content List' table with columns for Content, Status, Download HVA, Download TTS, Download VSL, File Count, Download Results, and Retry Content. A search field is located at the top right of the table. A 'records per page' drop-down menu is positioned above the table. The table contains four rows of data, each with a 'Download' and 'Update' button. Navigation buttons for 'Previous' and 'Next' are at the bottom of the table, with the number '1' indicating the current page.

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
520710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date				1776/1776	Download	Update
520712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date			N/A	1051/1051	Download	Update
520717 - SC READY/SCPASS Spring 2017	Up to Date				7168/7168	Download	Update
520811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date			N/A	827/827	Download	Update

Use the **records per page** drop-down menu to specify the number of records to display at once. You can select **10** (the default value), **25**, **50**, **100**, or **All** (for all records).

Use the **Previous** and **Next** buttons to move backward and forward between pages in the display. The number between the buttons indicates the number of the page you are currently viewing.

■ Using Content Caching

The TSM can cache (store) test items using its Content Caching option and this caching option is configurable. Before testing occurs, content caching stores copies of the test items that you can keep updated, manually or automatically, to guarantee that students are using the correct version of the test.

ⓘ Important: You cannot use a TSM for content caching if you are using COS service devices and Content Management in the same COS location. When you specify a COS service device to perform Content Management within a location, all content caching (Content Management) service is performed by this device.

Testing with Content Caching

With TSM content caching, before testing begins tests are downloaded from DRC's servers across the Internet and stored on the school or district computer where the TSM software is installed. When the student logs in at test time, the test content is downloaded from the TSM to the student's testing device.

ⓘ Important: With content caching, each morning before testing begins, verify that your TSM has the most current test items (see "Content Caching" on page 33).

Content Caching

The correct test content must be available when students start testing—students can only test using test content that is up to date. Because there may be updates to test content between the time the TSM was installed and testing begins, it is important to verify that the test items stored in the TSM are up to date. Before testing can begin, you must replace any test content that is out of date with the most current versions from DRC.

The **Content Caching** button displays the tests available on the TSM. These tests are available to download to INSIGHT.

Each testing administration in the cache is identified by a unique ID number followed by the name of the specific assessment. In some examples in this user guide, a generic identifier is displayed.

Testing Site Manager (TSM)
(includes Local Caching Service [LCS] capabilities)

TSM Name: District 1, Sample School, Bldg 3, Rm 7
TSM Version: 9.2.0_0
TSM Server Domain: 5d23623a-legacy-prod.drc-centraloffice.com
TSM Server IP: 10.1.98.130

Content Caching | Response Caching | Tools

Last Updated: 09/25/2017 11:20:16 AM
Update Content | Recheck Content

10 records per page

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
520710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1776/1776	<input type="button" value="Download"/>	<input type="button" value="Update"/>
520712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	1051/1051	<input type="button" value="Download"/>	<input type="button" value="Update"/>
520717 - SC READY/SCPASS Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7168/7168	<input type="button" value="Download"/>	<input type="button" value="Update"/>
520811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	827/827	<input type="button" value="Download"/>	<input type="button" value="Update"/>

Showing 1 to 4 of 4 entries

Content Caching | Response Caching | Tools

The **Status** column in the Content List table indicates whether all test forms in an administration are the most current version (up to date).

- If all of the most current versions of tests in an administration are on the TSM, the Status column displays **Up to Date** in green text.
- If the most current versions are not on the TSM, the Status column displays **Out of Date** in red text.

Note: An administration must have a status of Up to Date before it is administered. Otherwise, students receive an error message when they log in and will be unable to test.

Content Caching (cont.)

The **File Count** column in the Content List table indicates the number of files currently in the TSM and the total number that will be in the TSM when all of the necessary files are downloaded.

The format is X/Y, where X is the current number of files and Y is the total number of files.

When the TSM is up to date, these numbers should be the same.

Click the **Recheck Content** button to check the TSM for corrupted files.

The screenshot shows the TSM Content Caching interface. At the top, there are navigation buttons for 'Content Caching', 'Response Caching', and 'Tools'. Below these, there are two buttons: 'Update Content' and 'Recheck Content'. The 'Recheck Content' button is highlighted with a callout box. Below the buttons is a table titled 'Content List' with columns: Content, Status, Download HVA, Download TTS, Download VSL, File Count, Download Results, and Retry Content. The table contains four rows of content items, each with a 'Download' button in the 'Download Results' column. A callout box points to the 'Download' button in the first row.

The **Download Results** column in the Content List table contains a **Download** button that you can click to download a comma-separated values (.csv) file containing a list of all of the files in the TSM.

The screenshot shows a 'Save As' dialog box. The file name is 'Test_Admin_596372_File_Count.csv' and the save as type is 'Microsoft Excel Comma Separated Values File'. The dialog box has 'Save' and 'Cancel' buttons.

	A	B
1	Filename	Downloaded
2	2014_10_16_175141/108680/stimulus-1.html	complete
3	2014_10_16_175141/108680/css/full.css	complete
4	2014_10_16_175141/108680/css/gr1_3.css	complete
5	2014_10_16_175141/108680/css/speaking-stimulus.css	complete
6	2014_10_16_175141/108680/js/jquery-2.0.3.min.js	complete
7	2014_10_16_175141/108680/js/orientation-audio.js	complete
8	2014_10_16_175141/108680/js/wida.js	complete
9	2014_10_16_175141/108680/media/balloonwhite.svg	complete
10	2014_10_16_175141/108680/media/s15_directionspractice_p100_1.mp3	complete
11	2014_10_16_175141/108680/media/s15_directionspractice_p100_131101	complete
12	2014_10_16_175141/108680/media/vta_crop_edit-96x92.png	complete
13	2014_10_16_180407/i696093/stimulus-9.html	complete
14	2014_10_16_180407/i696093/css/full.css	complete

Content Caching (cont.)

To update all tests manually, click the **Update Content** button at the top of the page or the **Update** button in the Retry Content column. When you click **Update Content** or **Update**, the latest test content is downloaded. After the update is complete, the status changes to Up to Date and the **Last Updated** date and time is updated.

Note: The TSM also automatically checks for test content updates at regular intervals. If the computer where the TSM is installed is powered on, the TSM automatically updates the test content.

Click **Update Content** to update all of the tests in the TSM with the latest versions.

Important: On the day of testing, confirm that the TSM test content is up to date to ensure that students can log into their tests. For example, if the machine where the TSM is installed was turned off recently, it is possible that its content is out of date. If it is, click **Update Content** to update all content or **Update** to update a specific test.


The screenshot shows the Testing Site Manager (TSM) interface. At the top, it displays the TSM Name, Version, Server Domain, and Server IP. Below this are navigation tabs for Content Caching, Response Caching, and Tools. The main section shows the 'Last Updated' time and two buttons: 'Update Content' and 'Recheck Content'. A 'Content List' table is displayed with columns for Content, Status, Download HVA, Download TTS, Download VSL, File Count, Download Results, and Retry Content. The table contains four entries, all with a status of 'Up to Date'. At the bottom of the table, there are 'Previous' and 'Next' navigation buttons.

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
S20710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date				1776/1776		
S20712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date			N/A	1051/1051		
S20717 - SC READY/SCPASS Spring 2017	Up to Date				7168/7168		
S20811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date			N/A	827/827		

Click **Update** to update all tests to the latest version.

Content Caching (cont.)


When an update starts, the **Content Update** page displays information regarding the update process. After you read the information, click **OK**.

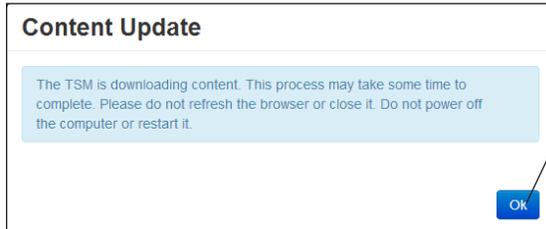

During the update, a progress bar displays to indicate the status of the update.



When the update is finished, the status changes to Up to Date, the Updating button reverts to Update Content, and the **Last Updated** date and time is updated.

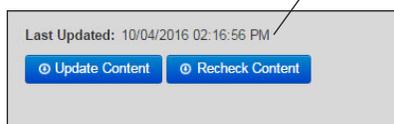

Response Caching—Viewing Unsent Student Test Responses

To check whether student test responses have been transmitted to DRC and for detailed information about those responses, Select **Response Caching–Unsent Responses**.

Note: If the Internet connection with DRC is lost while testing, student responses are saved to the TSM. When the TSM is communicating with DRC, these stored responses are transmitted automatically every fifteen minutes.

Testing Site Manager (TSM)
(Includes Local Caching Service [LCS] capabilities)

TSM Name: District 1, Sample School, Bldg 3, Rm 7
TSM Version: 9.2.0_0
TSM Server Domain: 5d23623a-legacy-prod.drc-centraloffice.com
TSM Server IP: 10.1.98.130

Content Caching | **Response Caching** | Tools

Unsent Responses
Historical Responses

Last Updated: 09/25
Update Content | Recheck Content

10 records per page

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
520710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1776/1776	Download	Update
520712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	1051/1051	Download	Update
520717 - SC READY/SCPASS Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7168/7168	Download	Update
520811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	827/827	Download	Update

Showing 1 to 4 of 4 entries

Content Caching | Response Caching | Tools

Select **Response Caching–Unsent Responses** to see information about student responses currently stored on the TSM for transmission to DRC.

Response Caching—Viewing Unsent Student Test Responses (cont.)

When you select **Unsent Responses**, the Student Responses—Unsent tab displays information about student responses currently stored in the TSM that are waiting to be transmitted to DRC.

You can send saved student responses manually by clicking the **Transmit Responses** button.

Content Caching | Response Caching | Tools

Unsent Tests: 4
Last Transmission Attempt: 01/14/2014 12:53:59 PM
Next Transmission Attempt: 01/14/2014 01:08:59 PM

Transmit Responses

10 records per page

School	Test Session	Student Name	State ID	Earliest Response
Demo Site 1	Grade 05	Demo One Student	231365498	01/14/2014 12:39:57 PM
Demo Site 1	Grade 05	Demo Two Student	231365499	01/14/2014 12:39:57 PM
Demo Site 2	Grade 06	Demo Three Student	231365400	01/14/2014 12:39:57 PM
Demo Site 2	Grade 06	Demo Four Student	231365401	01/14/2014 12:39:57 PM

Showing 1 to 4 of 4 entries

Previous 1 Next

Content Caching | Response Caching | Tools

Next Transmission Attempt indicates the date and time the next automatic transmission is scheduled. Responses are automatically transmitted every fifteen minutes.

Last Transmission Attempt indicates the date and time of the last attempt to transmit student responses.

Response Caching—Viewing Unsent Student Test Responses (cont.)

Unsent Tests indicates the number of tests that have not been sent to DRG.

! Important: Verify that this number is 0 (zero) at the end of each testing day and at the end of the entire testing period. If it is not zero, click the **Transmit Responses** button to transmit any stored responses.

Enter information in the **Search** field to search for specific data.

The screenshot shows the 'Student Responses - Unsent' page. At the top, there are tabs for 'Content Caching', 'Response Caching', and 'Tools'. Below the tabs, a box displays 'Unsent Tests: 4'. Underneath, it shows 'Last Transmission Attempt: 01/14/2014 12:53:59 PM' and 'Next Transmission Attempt: 01/14/2014 01:08:59 PM'. A 'Transmit Responses' button is visible. Below this is a search field and a table with columns: School, Test Session, Student Name, State ID, and Earliest Response. The table contains four rows of data. At the bottom of the table, it says 'Showing 1 to 4 of 4 entries' and has 'Previous' and 'Next' buttons with the number '1' between them.

School	Test Session	Student Name	State ID	Earliest Response
Demo Site 1	Grade 05	Demo One Student	231365498	01/14/2014 12:39:57 PM
Demo Site 1	Grade 05	Demo Two Student	231365499	01/14/2014 12:39:57 PM
Demo Site 2	Grade 06	Demo Three Student	231365400	01/14/2014 12:39:57 PM
Demo Site 2	Grade 06	Demo Four Student	231365401	01/14/2014 12:39:57 PM

By default, the Student Responses – Unsent page displays all of the information currently available.

Use the **Previous** and **Next** buttons to move backward and forward between pages in the display. The number between the buttons indicates the page you are currently viewing.

Response Caching—Viewing Historical Test Responses

Select **Historical Responses** from the drop-down menu to display information about student responses that have been transmitted to DRC.

The screenshot shows the Testing Site Manager (TSM) interface. At the top, it displays the TSM Name (District 1, Sample School, Bldg 3, Rm 7), TSM Version (9.2.0_0), TSM Server Domain (5d23623a-legacy-prod.drc-centraloffice.com), and TSM Server IP (10.1.98.130). Below this, there are three main menu items: Content Caching, Response Caching, and Tools. The Response Caching menu is expanded, showing two options: Unsent Responses and Historical Responses. A callout box with a line pointing to the Historical Responses option contains the text: "Select Response Caching—Historical Responses to display information about the student test responses that the TSM has sent to DRC." Below the menu, there are buttons for Update Content and Recheck Content. The main content area shows a table titled "Content List" with columns for Content, Status, Download HVA, Download TTS, Download VSL, File Count, Download Results, and Retry Content. The table contains four rows of data, all with a status of "Up to Date".

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
520710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1776/1776	Download	Update
520712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	1051/1051	Download	Update
520717 - SC READY/SCPASS Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7168/7168	Download	Update
520811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	827/827	Download	Update

Response Caching—Viewing Historical Test Responses (cont.)

Enter information in the **Search** field to search for specific data.

The screenshot shows a web interface for viewing historical test responses. At the top, there are tabs for 'Content Caching', 'Response Caching', and 'Tools'. Below the tabs, there is a summary section with 'Unsent Tests: 4', 'Last Transmission Attempt: 01/27/2014 12:18:50 PM', and 'Next Transmission Attempt: 01/27/2014 12:33:50 PM'. A 'Transmit Responses' button is also present. The main area is titled 'Student Responses - Historical' and features a search bar and a table. The table has columns for School, Test Session, Student Name, State ID, and Transmitted Timestamp. Two entries are shown: 'Demo Site 3' (Grade 04, Demo Five Student) and 'Demo Site 4' (Grade 05, Demo Six Student). Below the table, it says 'Showing 1 to 2 of 2 entries' and includes 'Previous' and 'Next' navigation buttons with a page number '1' between them.

School	Test Session	Student Name	State ID	Transmitted Timestamp
Demo Site 3	Grade 04	Demo Five Student	231365402	01/27/2014 12:28:46 PM
Demo Site 4	Grade 05	Demo Six Student	231365403	01/27/2014 12:28:46 PM

By default, the **Student Responses – Historical** tab displays all of the information currently available.

Use the **Previous** and **Next** buttons to move backward and forward between pages in the display. The number between the buttons indicates the page you are currently viewing.


■ Ping Activity

When the TSM “pings” the IP address of the DRC server, the network sends data packets from the TSM to the DRC server and back. The network also calculates the time, in milliseconds, it takes for the data to be received. The longer this time is, the longer it has taken the DRC server to receive the data packets (usually because of excess network traffic).


This rate of data transfer across a network is referred to as latency. Knowing the latency is useful for helping to determine peak network traffic times and for analyzing the best times for testing.

Graphing Ping Activity

Select **Tools–Ping Trends** to graph the time that was required by the TSM to ping the DRC servers for a date range that you specify, as well as the number of ping failures during the same date range.

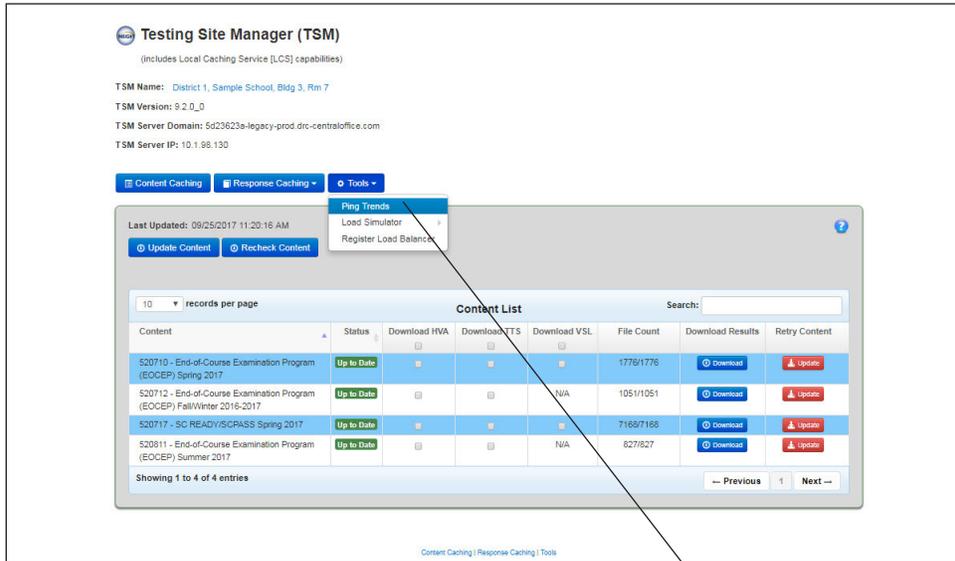


1. Select **Tools–Ping Trends** to display the Ping Trends page.

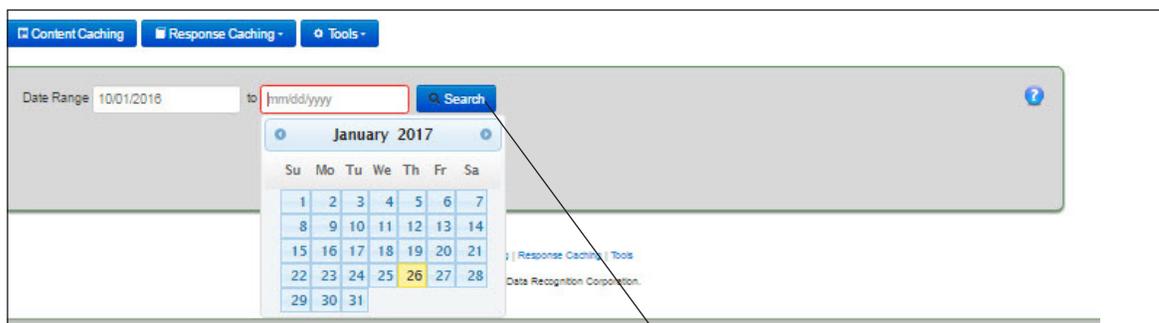

2. Use the drop-down calendars to specify a date range for the data and click **Search**.

Graphing Ping Activity (cont.)

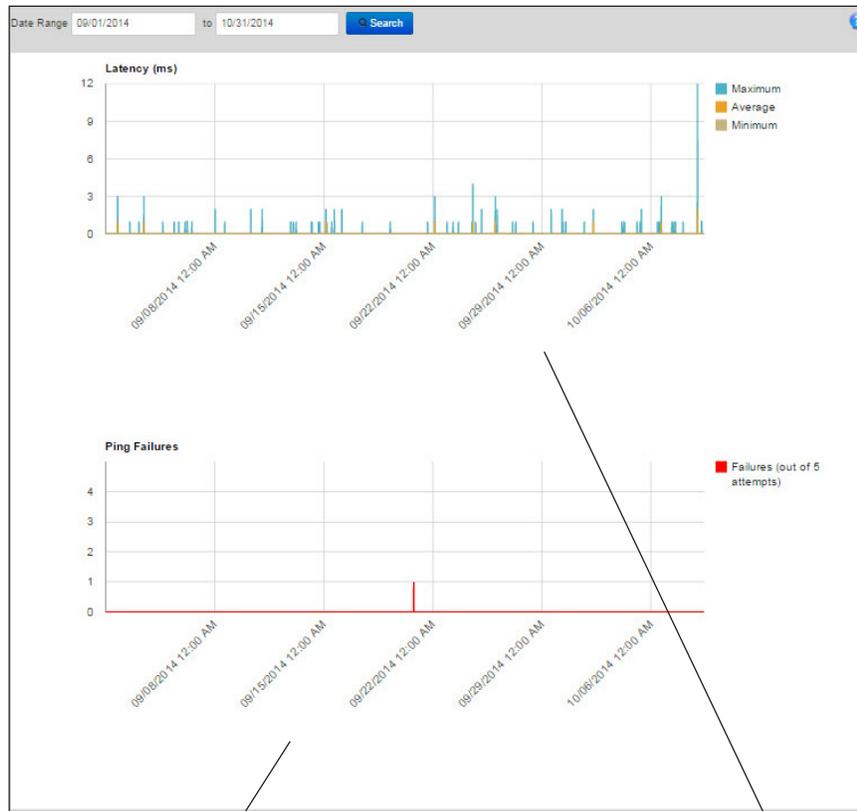


Two graphs display network communication information for the date range.

- The first graph reveals the latency of the network.
- The second graph indicates the number of ping failures.

Graphing Ping Activity (cont.)

The first graph displays a measure of the latency during the date range. Latency is a measure of the time delay in a system—the greater the latency, the slower the communication.

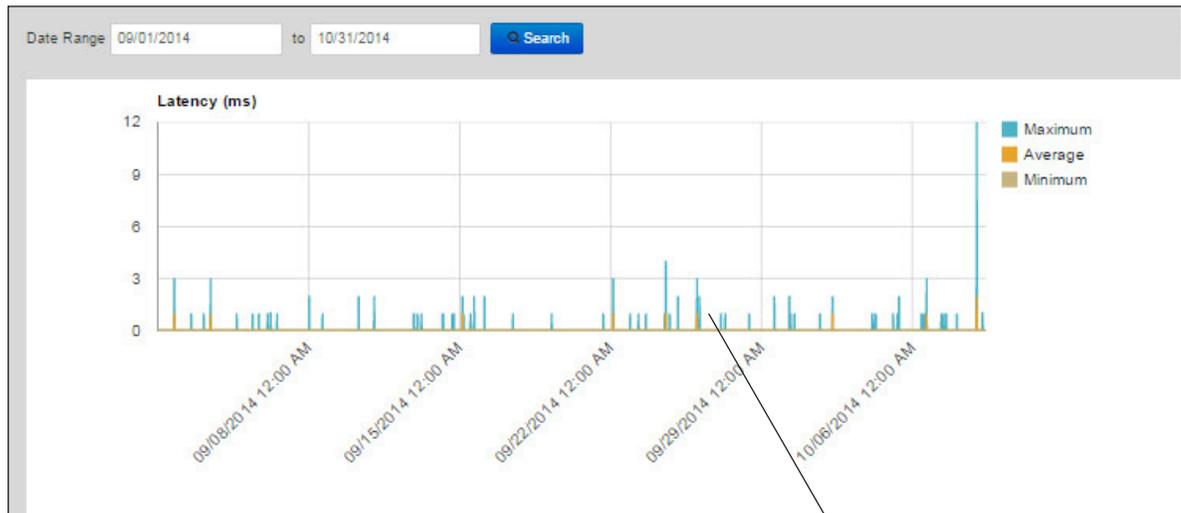


In this graph, latency represents the time required (in milliseconds) for ping attempts during the time period, organized by color:

- The blue line indicates the maximum amount of time needed for ping attempts.
- The orange line indicates the average amount of time needed for ping attempts.
- The tan line indicates the minimum amount of time needed for ping attempts.

As the time required for ping attempts increases, peaks or spikes appear that can indicate increased network traffic and slower response time. You can use this information to determine optimal testing times.

Graphing Ping Activity (cont.)

The second graph displays the number of ping failures during the date range. Ping failures are a good indicator of system availability—a spike, or high failure rate, indicates a time period of poor communication between the TSM and DRC. Similarly, a low failure rate indicates a good time for testing. You can use this information to determine optimal testing times.

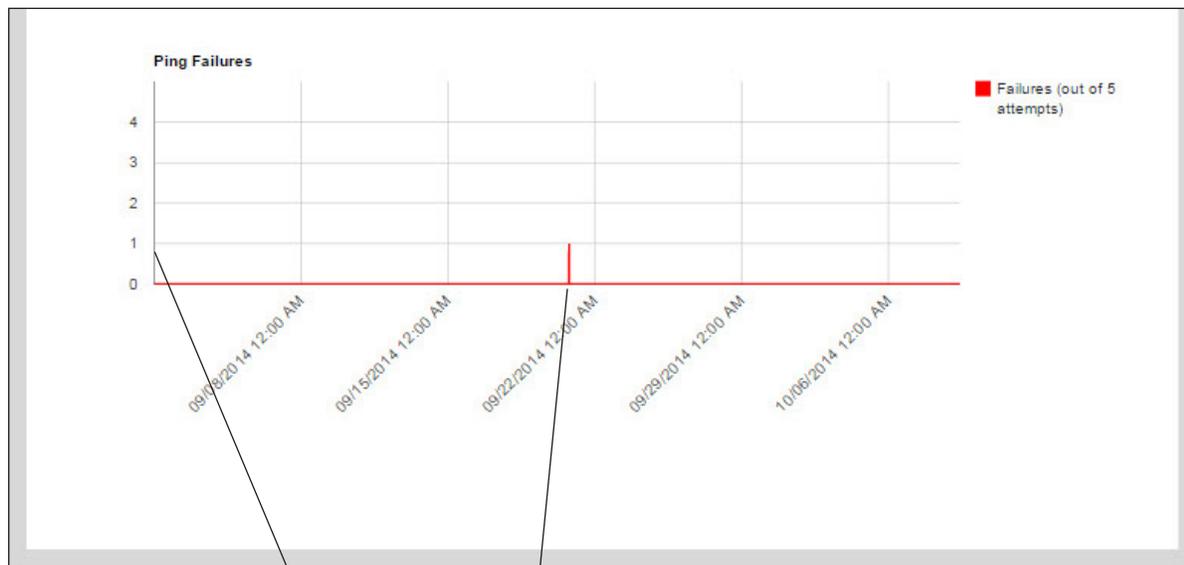

Ping failures indicate the number of times (y-axis) that the TSM was unable to successfully ping the DRC server after five attempts during each time interval* (x-axis).

*To graph ping failures, the TSM divides the date range you specified into equal date and time intervals.

■ Load Simulation Testing

Technology Coordinators (TCs) can perform load simulations to estimate the amount of time it will take during testing to download tests and upload responses. The following are prerequisites and tips for performing load simulation tests:

- The TSM must be installed, running, and connected to each testing device that you plan to include in the simulation.
- **⚠ Important:** For a load simulation test, limit the number of testing devices per TSM to 100. Attempting to perform a load simulation test with more than 100 devices may cause the TSM to become unresponsive. You may have to uninstall and reinstall the TSM.
- DRC recommends that you run the simulation three times during your load simulation testing. Run it twice specifying the TSM as the source for form content and once specifying DRC as the source for form content.
- Run different load simulations with different groups of devices to ensure that all devices are included in multiple simulations.
- INSIGHT must be installed on each testing computer that you plan to include in the simulation.
- The System Readiness Check must be displayed on the screen of each testing computer that you plan to include in the simulation.

Note: For general questions and answers regarding Load Simulation Testing, see *Load Simulation Testing Questions in Volume V: Troubleshooting*.

Load Simulation Testing and Actual Testing

⚠ Important: Enable load simulations only when you are actually conducting a load simulation test using a TSM and a set of student testing devices. Prior to actual student testing (when students are logging in and taking tests), be sure to disable load simulations for the TSM by selecting **Content Caching Only** for the TSM Content caching functions on the Locations page of the Central Office Services - Device Toolkit (see *Working with Locations in Volume III: Central Office Services [COS]* for more information).

Performing a Load Simulation

You use the TSM and INSIGHT to perform a load simulation—if you are not using a TSM for content caching, you cannot perform load simulations. First, group the device in a Central Office Services - Device Toolkit configuration that specifies the location of a TSM to use for content caching. Next, install INSIGHT on a testing device to register the testing device with the TSM. Now, start the TSM, specify which of the registered computers to include in the simulation, and run your simulations. Then, use the TSM to review the results of the simulations.

System Information				
Client Version	Configuration Source	Installation Directory		
6.0.0	Device Toolkit	C:\Program Files\DRC INSIGHT Online Assessments		
Machine Name	User Name	OS Level	OS Version	
		Microsoft Windows 7 Enterprise Edition Service Pack 1 (build 7601), 32-bit	6.1	
Response Caching TSM Connection	Response Caching TSM Configuration	Content Caching TSM Connection	Content Caching TSM Configuration	
https://10.1.99.78:8443/	Yes	https://10.1.99.78:8443/	Yes	
HTTPS Proxy	Device ID	Device Toolkit Organizational Unit and ID	District	School
	QJU	Level 2 Support (969)	Sample District	Sample School 2

Required Test List		
Status	Test Name	Details
✓	Screen Resolution	Details
✓	Internet Connection	Details
✓	RAM	Details
✓	Audio Capability	Details
✓	OS Level	Details
✓	User Agent	Details
✓	Response Caching TSM Connection	Details
✓	Response Caching TSM Status	Details
✓	Response Caching TSM Version	Details
✓	Content Caching TSM Connection	Details
✓	Content Caching TSM Version	Details
✓	Client Version	Details
✓	Folder Permissions	Details

Load Results Execute Tests Test Audio Exit

Copyright © 2015 Data Recognition Corporation.

1. To perform a load simulation, install INSIGHT on each testing device (see *Volume IV: DRC INSIGHT*) that you will be using in the load simulation.
2. Start the System Readiness Check (click the link and enter the four-digit passcode) to display the System Information page.
3. Verify that a TSM is configured correctly for content caching.

⚠ Important: If you have not configured a TSM for content caching for the configuration associated with the device, use the Central Office Services - Device Toolkit to either reconfigure the configuration or move the device to a different configuration (see *Volume III: Central Office Services [COS]*), and restart INSIGHT on the device.
4. When you are finished, leave the System Readiness Check open. The System Readiness Check must be active on each testing computer that you plan to include in the simulation.
5. Start the TSM by selecting **Start–All Programs–TestingSiteManager–TestingSiteManager**.

Performing a Load Simulation (cont.)

6. From the TSM, select **Tools–Load Simulator–Enable Simulator**.

The screenshot shows the Testing Site Manager (TSM) interface. At the top, it displays the TSM Name, Version, Server Domain, and Server IP. Below this, there are navigation tabs for 'Content Caching', 'Response Caching', and 'Tools'. The 'Tools' menu is open, showing options like 'Ping Trends', 'Load Simulator', 'Register Load Balancer', 'Enable Simulator', and 'Historical Simulations'. The 'Enable Simulator' option is highlighted. Below the menu, there is a 'Content List' table with columns for Content, Status, Download HVA, Download TTS, Download VSL, File Count, Download Results, and Retry Content. The table contains four entries, all with a status of 'Up to Date'.

7. You can specify the source for the test form content—the TSM or the DRC servers. Click the Enable Simulator checkbox and use the radio buttons to specify the source of the form content for the simulation.


Note: This step registers the testing computer with the TSM.

The screenshot shows the 'Enable Simulator' configuration page in the TSM. It features a 'Start Simulation' button and four radio buttons for selecting the form content source: 'Use TSM for form content source', 'Use DRC for form content source', and 'Use Client configuration for form content source'. Below this, there is a 'Registered Computers' table with columns for Computer and Computer Details. The table contains two entries, both with checkboxes selected. The footer of the page includes the copyright information: 'Copyright © 2014 Data Recognition Corporation.'


8. The Registered Computers page displays the number and name of each testing computer registered to the TSM.

Select one or more computers from the Computer column to include in the simulation by clicking the checkbox next to each computer's name. Click the checkbox at the top of the column to test all of the computers.


Performing a Load Simulation (cont.)

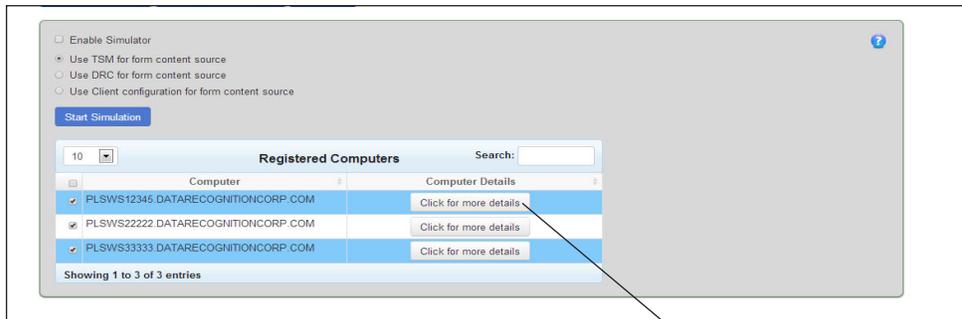



9. You are ready to run a simulation. To locate one or more computers in the list, use the Search box. Click the **Click for more details** button to display technical details about the testing computer. Click **Close** when you are finished.

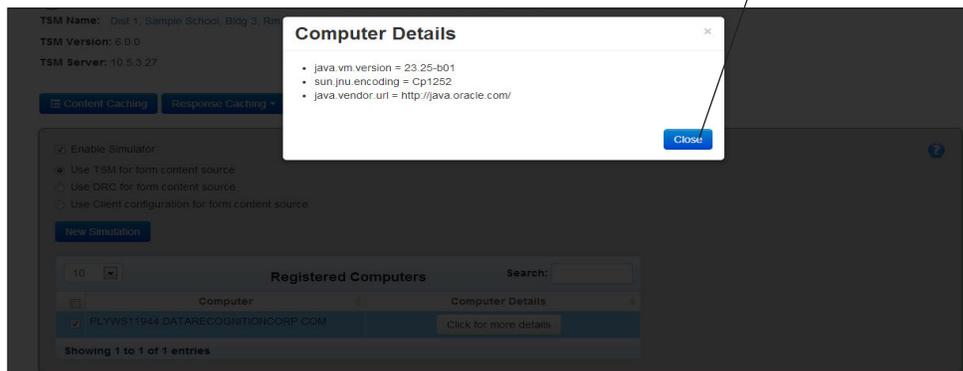

Performing a Load Simulation (cont.)

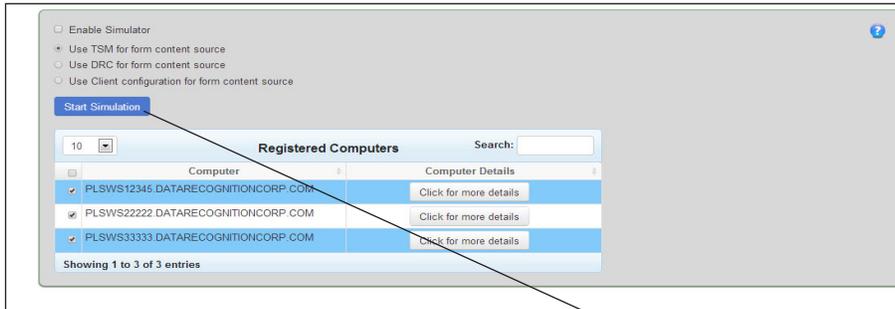

10. Click **Start Simulation** to start the simulation. You can click **Cancel Simulation** to cancel a simulation.

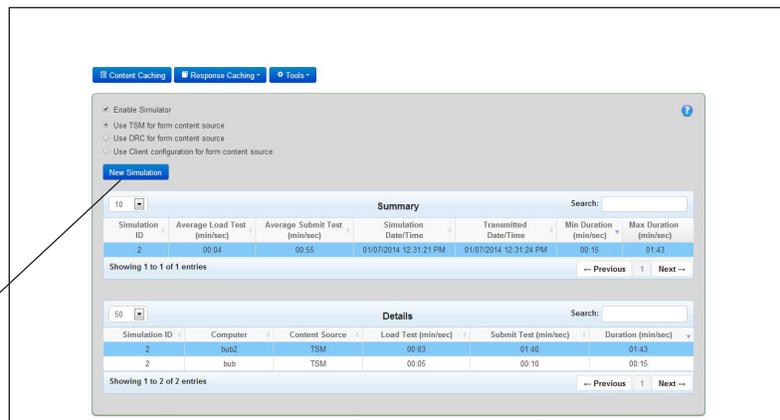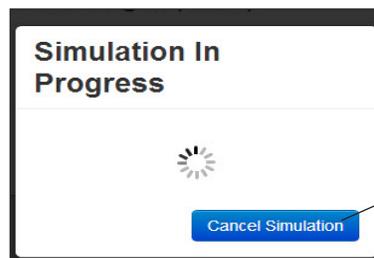

11. After a simulation, the **Start Simulation** button changes to **New Simulation** and each testing computer in the simulation displays a completion message.

To run another simulation, click the **New Simulation** button to reset it to **Start Simulation** and repeat steps 4–10. If you are finished, close the System Readiness Check on each testing computer.

Note: A simulation times out after ten minutes. The time for a simulation that lasts less than one second is rounded to one second.

Analyzing Load Simulation Results

When the load simulation finishes, the results display. For a description of the information displayed, refer to the tables on the following page.

The simulation results are sorted by Maximum Duration and Simulation ID. You can click the column headings to re-sort the data.

The screenshot displays the TSM simulation results interface. At the top, there are buttons for 'Content Caching', 'Response Caching', and 'Tools'. Below these are radio buttons for 'Enable Simulator' and three options for 'form content source'. A 'New Simulation' button is also present. The main area is divided into two sections: 'Summary' and 'Details'. The 'Summary' section shows a table with 7 columns: Simulation ID, Average Load Test (min/sec), Average Submit Test (min/sec), Simulation Date/Time, Transmitted Date/Time, Min Duration (min/sec), and Max Duration (min/sec). The 'Details' section shows a table with 6 columns: Simulation ID, Computer, Content Source, Load Test (min/sec), Submit Test (min/sec), and Duration (min/sec). A callout box points to the 'Max Duration' column header in the 'Summary' table.

Simulation ID	Average Load Test (min/sec)	Average Submit Test (min/sec)	Simulation Date/Time	Transmitted Date/Time	Min Duration (min/sec)	Max Duration (min/sec)
2	00:04	00:55	01/07/2014 12:31:21 PM	01/07/2014 12:31:24 PM	00:15	01:43

Simulation ID	Computer	Content Source	Load Test (min/sec)	Submit Test (min/sec)	Duration (min/sec)
2	bub2	TSM	00:03	01:40	01:43
2	bub	TSM	00:05	00:10	00:15

Analyzing Load Simulation Results (cont.)

The following tables describe the information displayed from the completed simulation.

Summary

The information in the Summary column summarizes simulation results across all of the testing computers in the simulation.

Heading	Description
Simulation ID	A system identifier for the simulation.
Average Load Test (min/sec)	The average time for the computers in the simulation to load test content.
Average Submit Test (min/sec)	The average amount of time for the computers in the simulation to submit all test responses to DRC. This time factors in the time required to submit each test response, the wait time between each test question, and the time required for the final test submission.
Simulation Date/Time	The date and time the simulation started.
Transmitted Date/Time	The date and time the simulation results were transmitted to DRC.
Min Duration (min/sec)	The time required for the fastest computer in the simulation to load the test and submit the results.
Max Duration (min/sec)	The time required for the slowest computer in the simulation to load the test and submit the results.


Details

The information in the Details column shows simulation details for each testing computer in the simulation.

Heading	Description
Simulation ID	A system identifier for the simulation.
Computer	The unique name of each computer in the simulation.
Content Source	The source of the test content loaded to the testing computer, DRC or TSM.
Load Test (min/sec)	The time it took the testing computer to load test content.
Submit Test (min/sec)	The time it took the testing computer to submit test responses to DRC.
Duration (min/sec)	The total time it took the testing computer to load the test and submit the results.


Viewing Historical Simulation Data

Use the Historical Simulations option to view the results of one or more simulations that you select. For a description of the meaning of the information displayed, refer to the tables that follow.

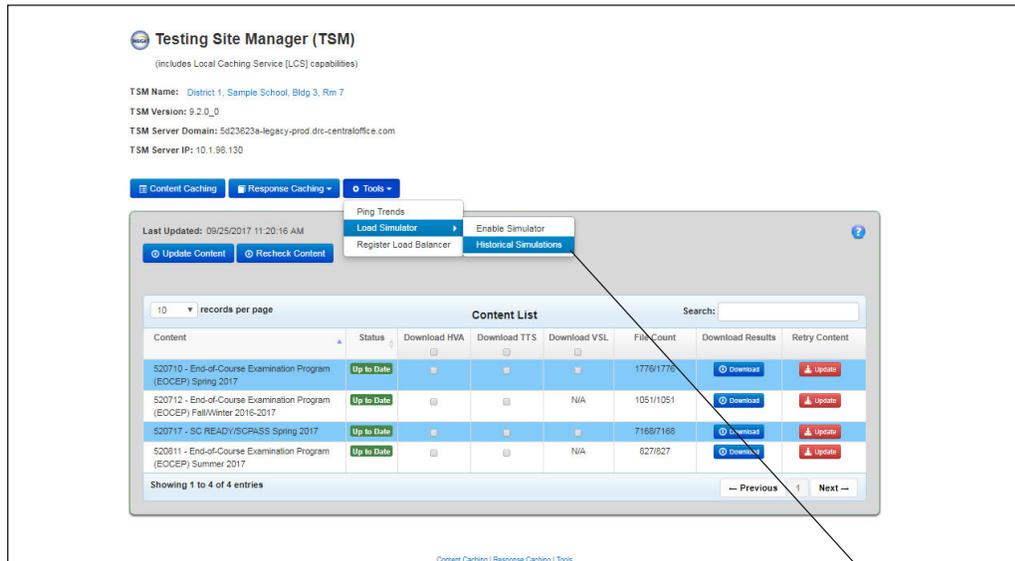

To select one or more simulations, do the following:

1. Select **Tools–Load Simulator–Historical Simulations**.
2. Click **Select Simulations**.
3. The Select Simulations dialog displays. Click a checkbox for each simulation you want to display.
4. Click **OK** to view the results.

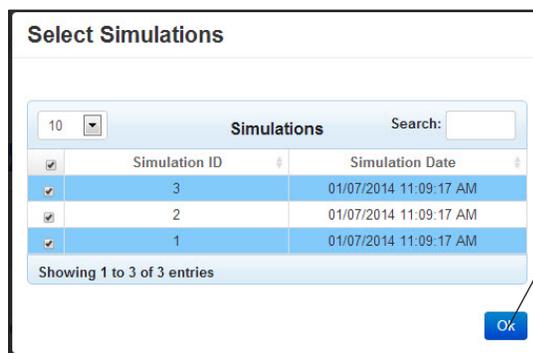

Viewing Historical Simulation Data (cont.)

Content Caching Response Caching Tools

Select Simulations

10 Summary Search:

Simulation ID	Average Load Test (min/sec)	Average Submit Test (min/sec)	Simulation Date/Time	Transmitted Date/Time	Min Duration (min/sec)	Max Duration (min/sec)
2	00:08	00:06	01/07/2014 11:09:17 AM		00:13	00:14
3	00:06	00:06	01/07/2014 11:09:17 AM		00:09	00:18
1	00:04	00:06	01/07/2014 11:09:17 AM		00:08	00:10

Showing 1 to 3 of 3 entries -- Previous 1 Next --

10 Details Search:

Simulation ID	Computer	Content Source	Load Test (min/sec)	Submit Test (min/sec)	Duration (min/sec)
3	PLSWS22222.DATARECOGNITIONCORP.COM	DRC	00:13	00:05	00:18
2	PLSWS33333.DATARECOGNITIONCORP.COM	DRC	00:08	00:06	00:14
2	PLSWS11111.DATARECOGNITIONCORP.COM	DRC	00:07	00:07	00:13
2	PLSWS22222.DATARECOGNITIONCORP.COM	DRC	00:09	00:05	00:13
1	PLSWS11111.DATARECOGNITIONCORP.COM	TSM	00:03	00:07	00:10
1	PLSWS33333.DATARECOGNITIONCORP.COM	TSM	00:03	00:06	00:09
3	PLSWS33333.DATARECOGNITIONCORP.COM	TSM	00:03	00:06	00:09
3	PLSWS11111.DATARECOGNITIONCORP.COM	TSM	00:03	00:07	00:09
1	PLSWS22222.DATARECOGNITIONCORP.COM	TSM	00:04	00:05	00:08

Showing 1 to 9 of 9 entries -- Previous 1 Next --

The results display for the simulations you selected.

- For a description of the meaning of the information displayed, refer to the tables on the following page.

Note: The results are sorted by Maximum Duration and Simulation ID. You can click the column headings to re-sort the data.

Viewing Historical Simulation Data (cont.)

The following tables describe the simulation information that displays.

Summary (Historical)

The historical summary information summarizes simulation results across all of the testing computers in the simulation selected.

Heading	Description
Simulation ID	A system identifier for the simulation.
Average Load Test (min/sec)	The average time for the testing computers in the simulation to load test content.
Average Submit Test (min/sec)	The average amount of time for the computers in the simulation to submit all test responses to DRC. This time factors in the time required to submit each test response, the wait time between each test question, and the time required for the final test submission.
Simulation Date/Time	The date and time the simulation started.
Transmitted Date/Time	The date and time the simulation results were transmitted to DRC.
Min Duration (min/sec)	The time required for the fastest computer in the simulation to load the test and submit the results.
Max Duration (min/sec)	The time required for the slowest computer in the simulation to load the test and submit the results.

Details (Historical)

The historical detail information shows simulation details for each testing computer in the simulation selected.

Heading	Description
Simulation ID	A system identifier for the simulation.
Computer	The unique name of each computer in the simulation.
Content Source	The source of the test content loaded to the testing computer, DRC or TSM.
Load Test (min/sec)	The time it took the testing computer to load test content.
Submit Test (min/sec)	The time it took the testing computer to submit test responses to DRC.
Duration (min/sec)	The total time it took the testing computer to load the test and submit the results.

■ Load Balancing the TSM

Prerequisites

This topic describes the process of using the Load Balancing Registration feature of the Testing Site Manager (TSM). If your site is using load balancing hardware and software, you can use this feature to register a load balancer IP address for your pool of TSM servers to help manage your workload more efficiently.

- Your site must have installed and configured your load balancing hardware and software.
- You must know the IP address of your load-balanced server pool.
- You must have installed the optional TSM level 9.1.0_2 update (or higher).


ⓘ **Important:** The TSM load balancing feature is supported for content caching only—response caching is not supported for load balancing.

Registering a TSM for Load Balancing

Use the following process to register your TSM in your load balancing pool.

1. To register a TSM for load balancing, navigate to `https://<TSM domain name>:8443/` or `http://<TSMip>:8080/`

Where: `<TSM domain name>` is your TSM Server Domain name and `<TSMip>` is the IP address of your TSM machine.

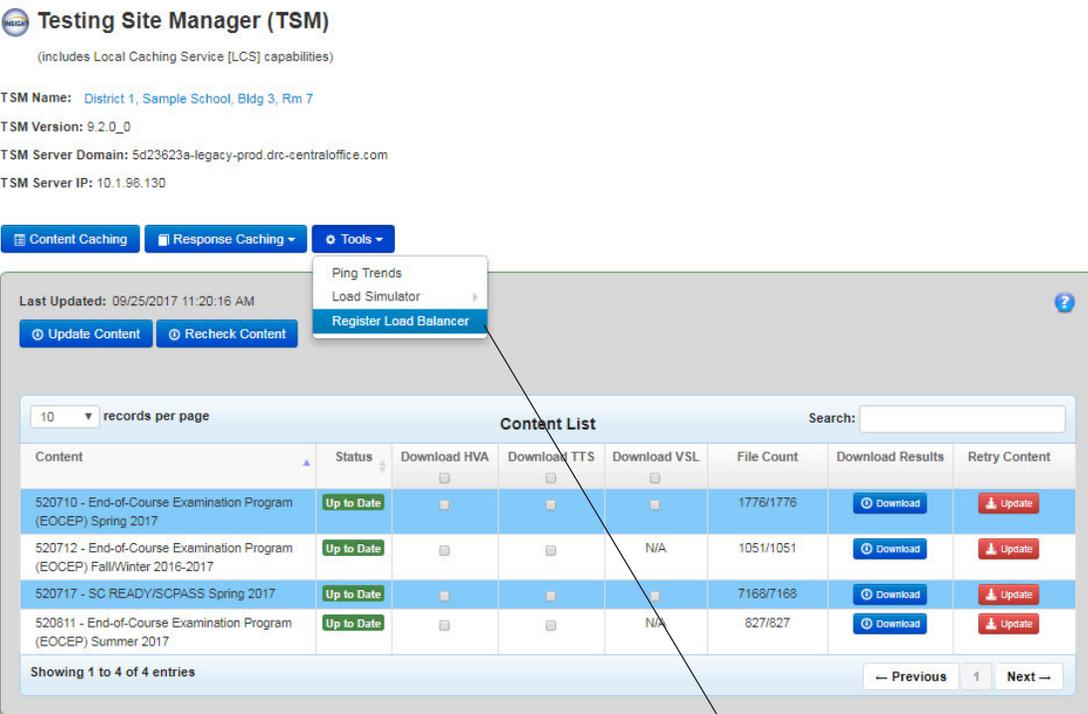

The screenshot shows the Testing Site Manager (TSM) interface. At the top, it displays the TSM Name, Version, Server Domain, and Server IP. Below this, there are navigation tabs for Content Caching, Response Caching, and Tools. The Tools menu is open, showing options for Ping Trends, Load Simulator, and Register Load Balancer. A table below the menu lists content items with columns for Content, Status, Download HVA, Download TTS, Download VSL, File Count, Download Results, and Retry Content. The 'Register Load Balancer' option is highlighted with a blue box and a line pointing to the second step of the instructions.

Content	Status	Download HVA	Download TTS	Download VSL	File Count	Download Results	Retry Content
520710 - End-of-Course Examination Program (EOCEP) Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1776/1776	Download	Update
520712 - End-of-Course Examination Program (EOCEP) Fall/Winter 2016-2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	1051/1051	Download	Update
520717 - SC READY/SCPASS Spring 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7168/7168	Download	Update
520811 - End-of-Course Examination Program (EOCEP) Summer 2017	Up to Date	<input type="checkbox"/>	<input type="checkbox"/>	N/A	827/827	Download	Update

2. When the TSM displays, select **Register Load Balancer** from the **Tools** drop-down menu.

Registering a TSM for Load Balancing (cont.)

The screenshot shows a web interface with three tabs: 'Content Caching', 'Response Caching', and 'Tools'. Below the tabs is a form with a text input field labeled 'Load Balancer IP Address' and a blue 'Register' button. A question mark icon is visible to the right of the input field. Below the form, there is a footer with the text 'Content Caching | Response Caching | Tools' and 'Copyright © 2016 Data Recognition Corporation.'


- 3.** When the Load Balancer IP Address field displays, enter the IP address of the load balancer pool and click **Register**.

The screenshot shows the same web interface as above, but now the 'Load Balancer IP Address' field contains the text '10.1.108.212'. Below the input field, the 'Load Balancer Domain URL' is displayed as '83eee632-legacy-lb-staging.drc-centraloffice.com'. A red arrow points to the 'Register' button. The footer text remains the same: 'Content Caching | Response Caching | Tools' and 'Copyright © 2016 Data Recognition Corporation.'


- 4.** The system creates a Load Balancer Domain URL that you can use to register the TSM in the Central Office Services - Device Toolkit. Copy or write down the URL.

⚠ **Important:** Record the Load Balancer domain URL. **The Load Balancer Domain URL is not saved on the TSM page.** If you lose or forget the Load Balancer Domain URL, you must repeat steps 1–4 to generate a new one.

Registering a TSM for Load Balancing (cont.)

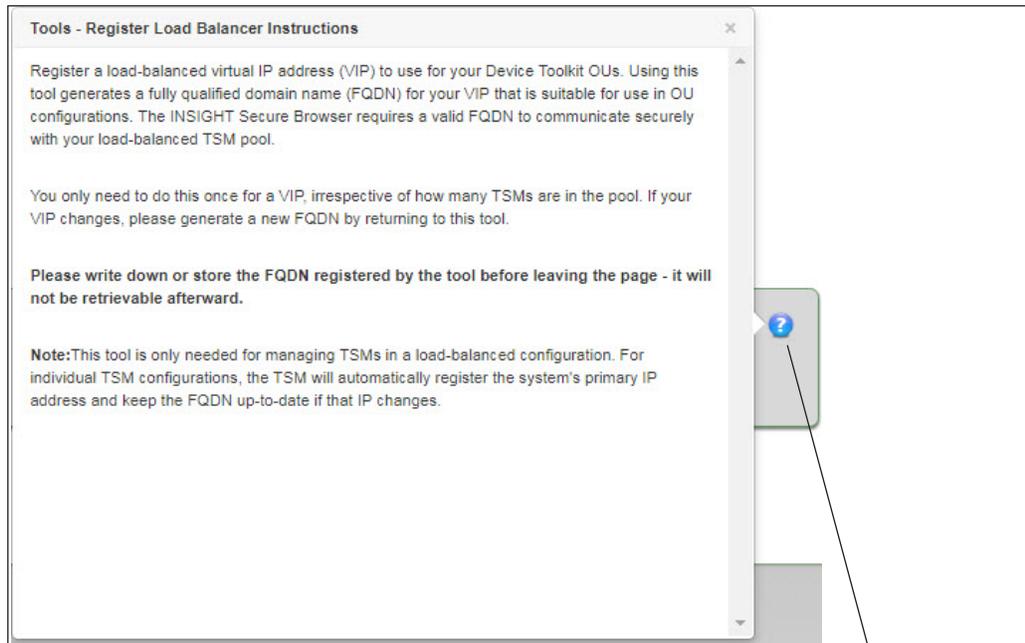


5. For additional information, click the blue question mark icon (?) to display online Help about load balancing registration.



6. Navigate to your eDIRECT site, open the **All Applications** menu bar, and click the **Device Toolkit** link.

Registering a TSM for Load Balancing (cont.)

7. In the Central Office Services - Device Toolkit, specify a testing program and site (district and/or school), and select the configuration for the TSM from the dashboard (see *Volume III: Central Office Services [COS]*).

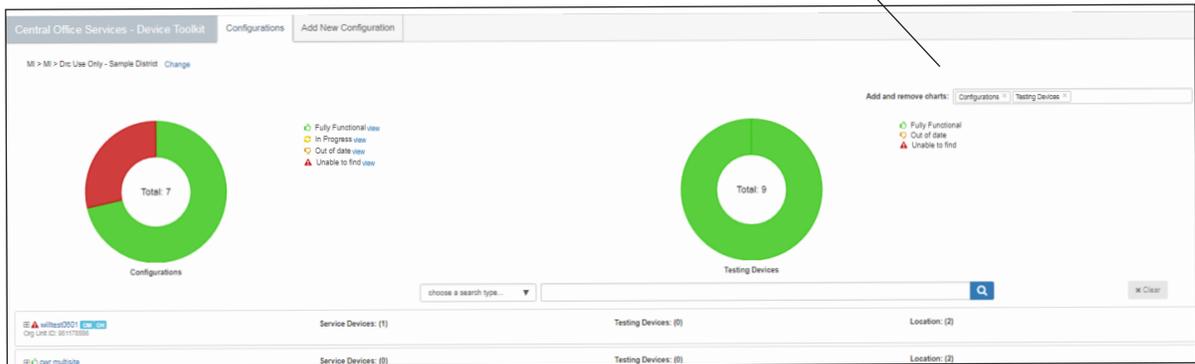

8. Select the Locations tab, toggle **TSM Content Caching** to **Yes** (if necessary), and in the Content Caching URL field enter `https://`, followed by the Load Balancer Domain URL, a colon (:), the port number (8443 in the example), and a forward slash (/).

See the example, but do not copy—it is an example only.

Example


`https://19c3438e-legacy-lb-prod.drc-centraloffice.com:8443/`

9. Click **Update Configuration**.

! Important: Load balancing is supported for content caching only—response caching is not supported for load balancing.

■ Updating the TSM Clock Time

Some DRC testing sites that download test content and/or software updates from Amazon CloudFront™ have reported receiving the following Content Update Error message (see below) when installing new Testing Site Manager (TSM) software or when trying to update existing TSM software.

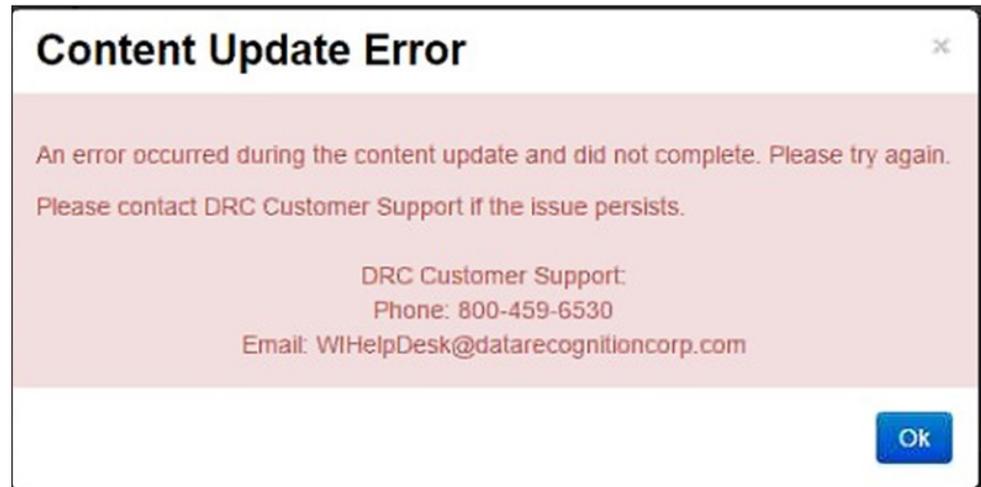

The Issue

This issue can occur if your TSM cannot reach DRC's content servers. It also occurs when the local time on the TSM computer is not correct. The clock that the TSM computer is using must be set to within 30 seconds of an accurate time source, such as the time displayed at www.time.gov.

The Resolution

To resolve the issue, verify that you have whitelisted the correct URLs (for details, see *Volume I: Introduction to Online Testing*).

Also verify that the clock setting on the TSM computer is synchronized with the time at the www.time.gov website and reset it, if necessary. After the clock is set correctly, the TSM update content process will resume working correctly. For details about how to review and reset the time on a Windows™ or Mac® computer to automatically be in synchronization with www.time.gov, see the instructions that follow.


.....
! **Important:** If your site uses Active Directory™ for your Windows network and is having problems getting the clock to remain at a set time, it may be an Active Directory issue. Active Directory automatically sets the time of all of the client machines in the network. To resolve the issue, you must correct the time on the Active Directory masters and Active Directory will propagate the correct time to the other devices in the network. For more information, refer to your Active Directory documentation.
.....

Resetting the Time on a Windows 7 TSM Computer


Perform the following steps to verify and reset the TSM Windows 7 computer time, if necessary.




1. Using a browser, go to www.time.gov to display the correct time.

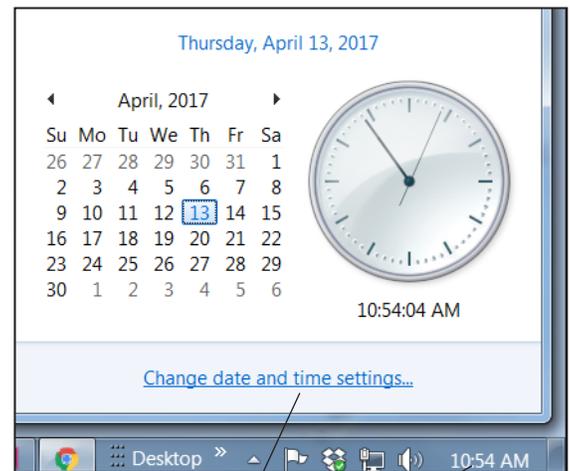

2. Display the clock from the desktop. If the times are not within 30 seconds of each other, click **Change date and time settings....**

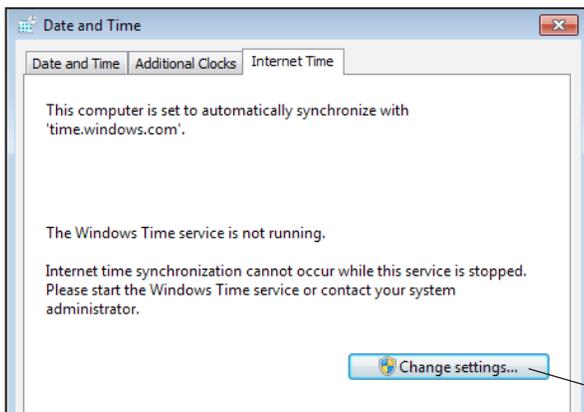

3. Select the **Internet Time** tab and click **Change settings....**

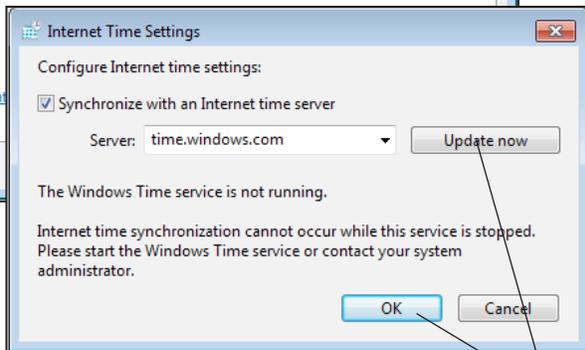

4. When the Internet Time Settings dialog box displays, check **Synchronize time with an Internet time server**, select the default server (time.windows.com, which is synchronized with www.time.gov), click **Update now** to start the Windows Time service, and click **OK**.


Working with the TSM

Resetting the Time on a Mac (OS X and macOS) TSM Computer


Perform the following steps to verify and reset the TSM Mac computer time, if necessary.




1. Using a browser, go to www.time.gov to display the correct time.

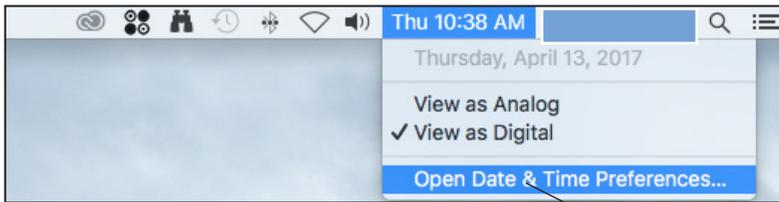

2. Check the clock time on the desktop. If the times are not within 30 seconds of each other, right-click on the time and select **Open Date & Time Preferences...**

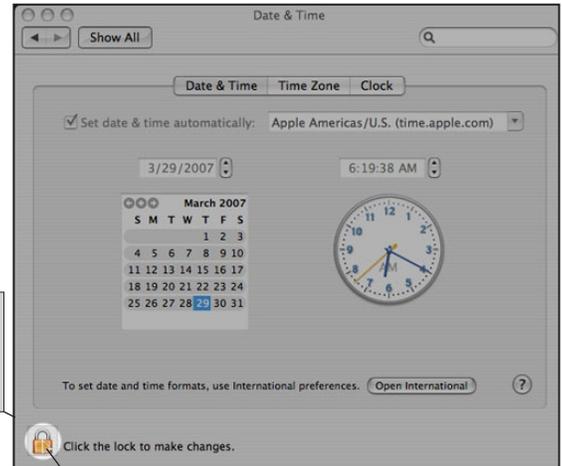


3. When the Date and Time window displays, unlock the display to change the time.

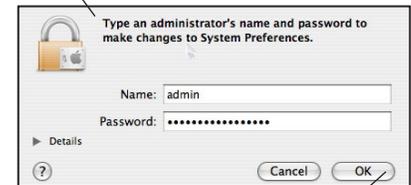

4. When the administrator dialog displays, enter your name and password, and click **OK**.

Note: You must be a Mac system administrator on the Mac computer to change the time.

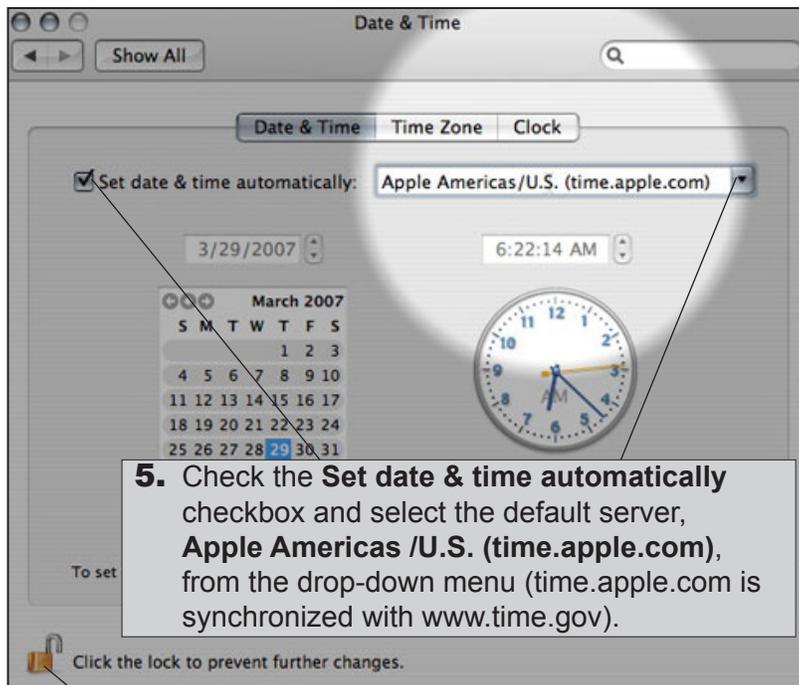

5. Check the **Set date & time automatically** checkbox and select the default server, **Apple Americas /U.S. (time.apple.com)**, from the drop-down menu (time.apple.com is synchronized with www.time.gov).

6. Click the lock to save your changes.

Appendix: Configuring a TSM for Response Caching in COS



■ Using a TSM with COS

The initial release of Central Office Services (COS) allows you to create COS configuration consisting of one or more service devices, testing devices, and Testing Site Managers (TSMs).

Although you can use TSMs defined to a location within a COS configuration for content caching and/or response caching, the primary function of a TSM in a COS environment is response caching.

For example, you cannot specify a TSM for content caching if you are using COS service devices and Content Management in the same COS location. When you specify a COS service device to perform Content Management within a location, all content caching (Content Management) service is performed by this device.

This appendix describes how to associate an installed and configured TSM with a location within a COS configuration for response caching. For details regarding how to install and configure a TSM, refer to the appropriate information within this volume.


Quick Tour: Specifying a TSM in COS for Response Caching

You can use the COS Locations tab to specify a TSM for response caching for a location within a configuration.


1. Navigate to the COS dashboard by opening the **All Applications** menu bar and selecting **Central Office**.



2. Select a client and enter a site name (at least three letters) to display a dashboard for the site.

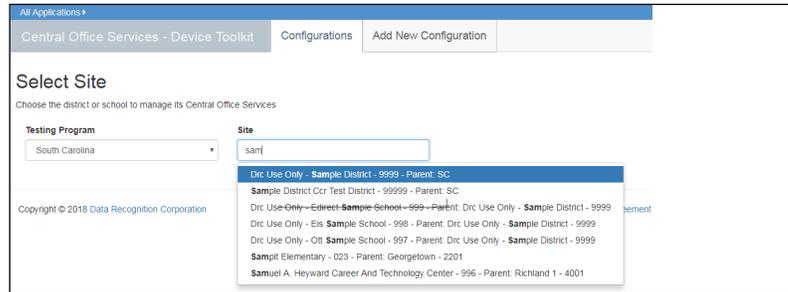

3. When the COS dashboard displays, click on a configuration name and select the **Locations** tab to display the Locations page for the configuration.

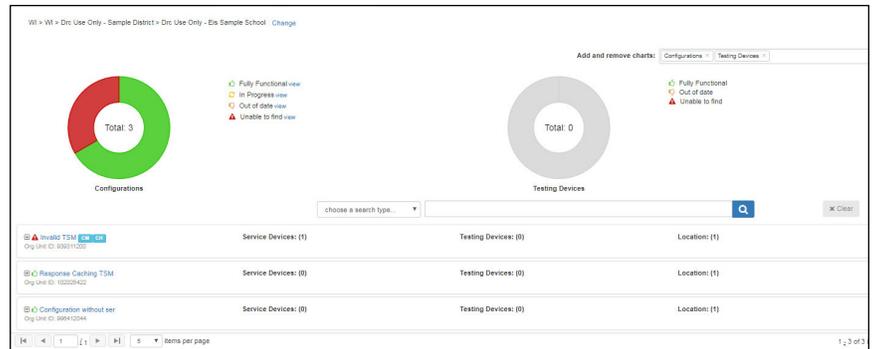

4. The Locations page shows the location(s) where the testing devices are registered.

- To add a TSM to the existing location, see step 5.
- To add a new location and specify a TSM, select a client from the Client drop-down menu, enter at least three letters of the site name in Site menu, select a site from the list that appears, and click **Add Location**. The new Locations page will appear.



! **Important:** You are restricted to viewing only the configurations for sites that you can access.

Quick Tour: Specifying a TSM in COS for Response Caching (cont.)

- To specify a TSM for response caching, toggle the **TSM Response Caching** option to **Yes**. In the field below, enter or paste the TSM Server Domain Name, prefixed with `https://` and followed by a colon, the port number, and a forward slash (/).

Example

`https://37525ee4-19413d7348e5-drc-centraloffice.com:8443/`

Note: Do not use the example—it is an example only.

When you enter the URL to the TSM, a message displays indicating the TSM Response Caching is enabled.

- When you are finished making updates, click **Update Configuration**.

A message displays confirming that the configuration was updated.

Notes



Data Recognition Corporation (DRC)
13490 Bass Lake Road
Maple Grove, MN 55311

Toll Free 1-800-451-7834
eDIRECT: <https://sc.drccdirect.com>
Email: SCProject@datarecognitioncorp.com
Revision Date: July 23, 2018